

iD Spesso 55 / 70 Square Set 55 / 70

LUXURY VINYL TILES


**Stimulate
ambiances
with resistant
and large
vinyl tiles**



GREAT DESIGN, LASTING PERFORMANCE AND PRACTICAL AFFORDABILITY

iD Spesso & Square Set is the best duo to bring the full trifecta: great design, lasting performance and practical affordability.

GREAT VARIETY OF DESIGNS




These collections offer two new design families: the Classy Oak woods, a very pure and calm wood design and the Soft Terrazzo, a trendy neutral terrazzo. Our best-selling classics: Soft Oak, Primary Pine, Venezia and Cement design families are also reconducted. With a total of 20 designs, our new collections will support your vision for every space.

LASTING PERFORMANCE




Available in two wear layer thickness, 0.55 and 0.70mm our Collections meet Class 33 certification for heavy commercial use. Protected by our strong TopClean XP polyurethane coating, these authentic-looking LVT visuals help you create stylish, durable environments at a competitive price point.

TWO INSTALLATION METHODS POSSIBLE



iD Spesso enables a traditional and quick glue down installation while Square Set can be laid and take up again thanks to a special herringbone pattern. This collection is the best option for a reliable and fast renovation. Both collections come with 4 and 5mm thickness, enabling installation in a larger variety of subfloors.

A SUSTAINABLE SOLUTION



Through our Tarkett Human-Conscious Design® approach, we develop flooring that helps people flourish in their every day without compromising on health and the environment. With 90% of time spent indoors, clear air matters. Our LVT collections showcase ultra low VOC emissions, less than 100µg/m³ TVOC after 28 days. Our LVT is also phthalate-free. It contributes to healthier spaces and helps you reach green building certifications like WELL and LEED.



CAPTURING THE BEAUTY OF WOOD AND STONE

BRINGING THE OUTDOORS INSIDE

Nature guides every aspect of our design journey. We have carefully selected our 20 designs to replicate as good as possible the diversity that we find in nature. By selecting the best natural tones of wood and expressive stones, we have sought to bring the outdoors in. The variety of our designs gives you the freedom to subtly match the style that best suits your space.

THE POWER OF NATURE


We aim to create positive emotions to help enhance learning, working and caring. iD Spesso & Square Set decors were selected to foster a feelgood atmosphere and bring interior designs to life. We are happy to provide two new design families: the Classy Oak wood, a very pure and calm wood designs and the Soft Terrazzo, a trendy neutral terrazzo.

A UNIQUE LARGE TILE FORMAT


To bring innovation and premium look, we designed the cement tiles in a large format of 91x91 cm, to better reproduce the large Terrazzo tiles. For wood, for keep our most practical and best-selling format with 122 x 23cm.

TWO SOLID CONSTRUCTIONS WITH TWO INSTALLATION METHODS


Product Construction

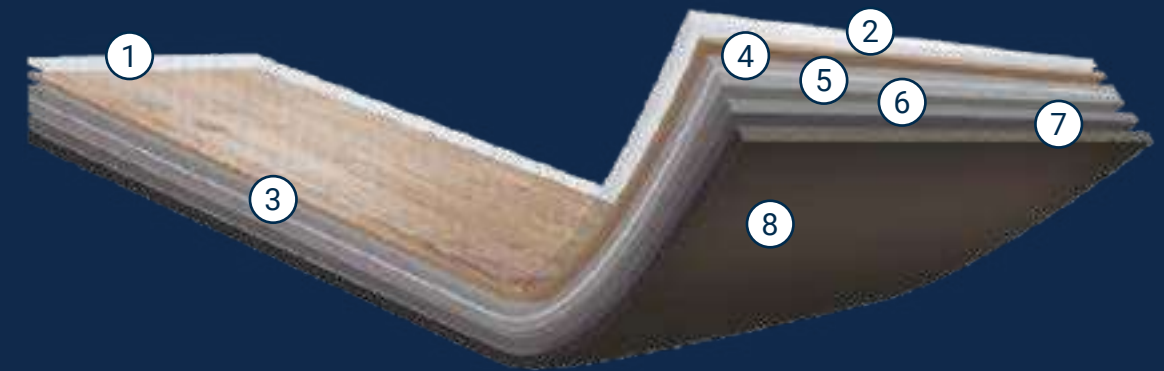

Two different backings:



Square set



iD Spesso

①

TopClean XP™

UV photo crosslinked polyurethane which allows for easy maintenance and extra resistance to scuffs, scratches and stains.

②

Wear layer

0.55 mm and 0.70mm for commercial traffic resistance.

③

Printed film

In 20 different wood and stone designs.

④

Core layer

for proper resistance to indentation.

⑤

Glass fiber reinforcement

for perfect dimensional stability.

⑥

Bottom layer

for a solid basis to the product.

⑦

Balancing layer

for a curl-free product.

⑧

Backing

iD Spesso – Backing layer made of PVC for glue down installation
Square Set – Herringbone anti-skid backing for loose lay installation




Classy Oak BEIGE 002


EASY AND CREATIVE INSTALLATION

Mix & Match designs, planks and tiles formats to compose unique and creative layout.


RANDOM




LADDER



MOSAIQUE



STAGGERED




BASKET WEAVE BLOCK




FUNKY HERRINGBONE



STAIRS





PATCHWORK

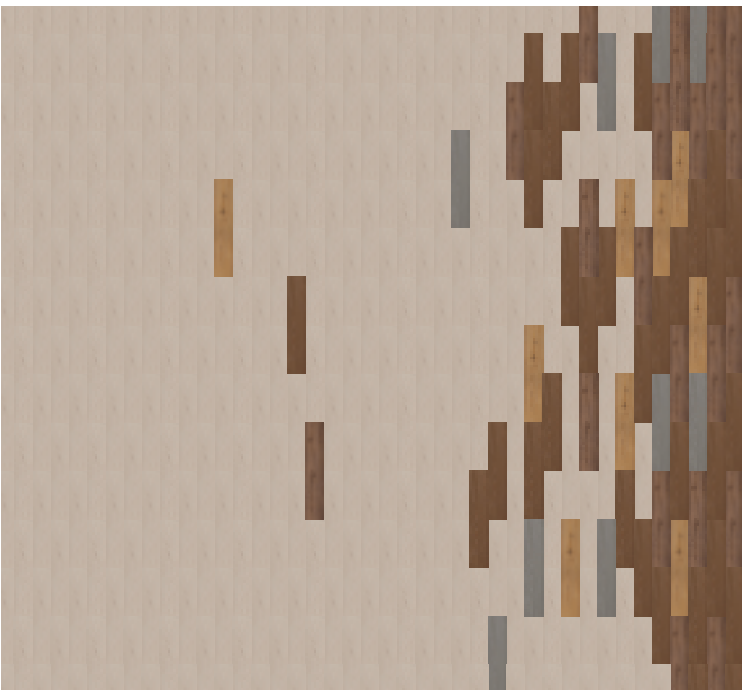

DISSOLVED HERRINGBONE





iD Spesso 55 / 70
Square Set 55 / 70

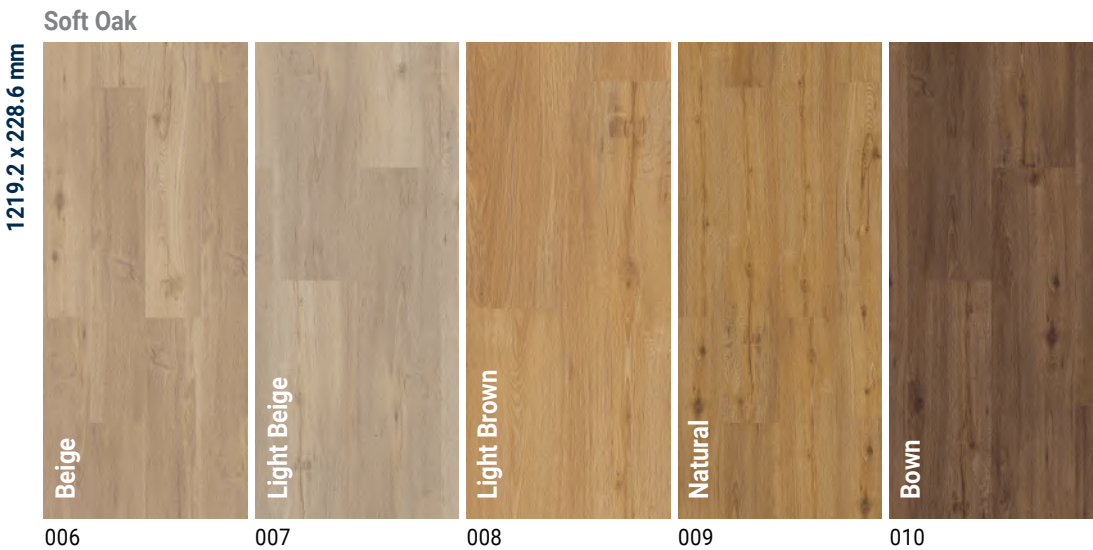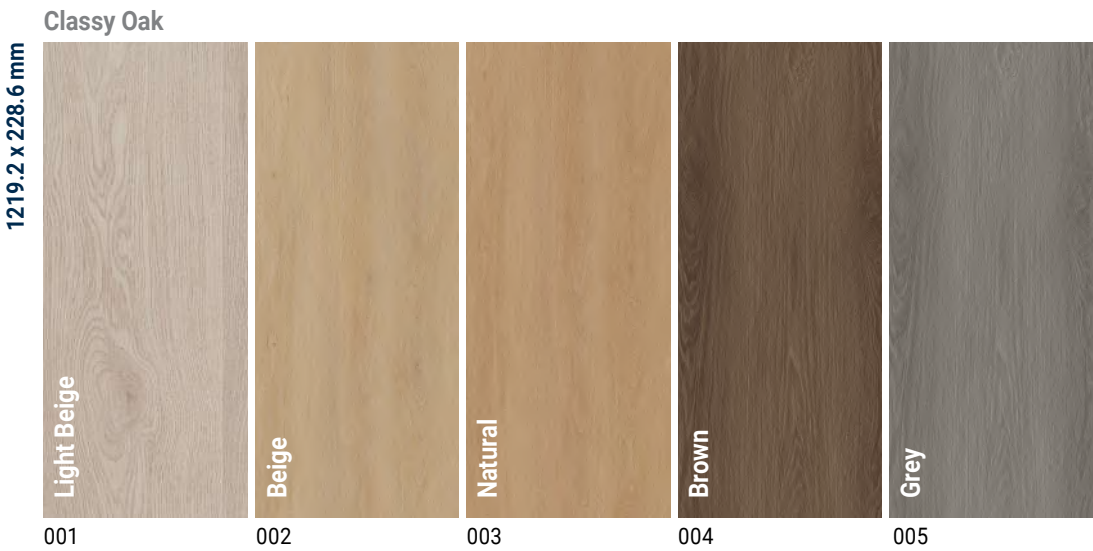


iD Spesso 55 – 1219.2 x 228.6 mm – 256073 / iD Spesso 70 – 1219.2 x 228.6 mm – 256079
iD Spesso 55 – 914.4 x 914.4 mm – 256072 / iD Spesso 70 – 914.4 x 914.4 mm – 256078

Square Set 55 – 1219.2 x 228.6 mm – 256075 / Square Set 70 – 1219.2 x 228.6 mm – 256081
Square Set 55 – 914.4 x 914.4 mm – 256074 / Square Set 70 – 914.4 x 914.4 mm - 256080

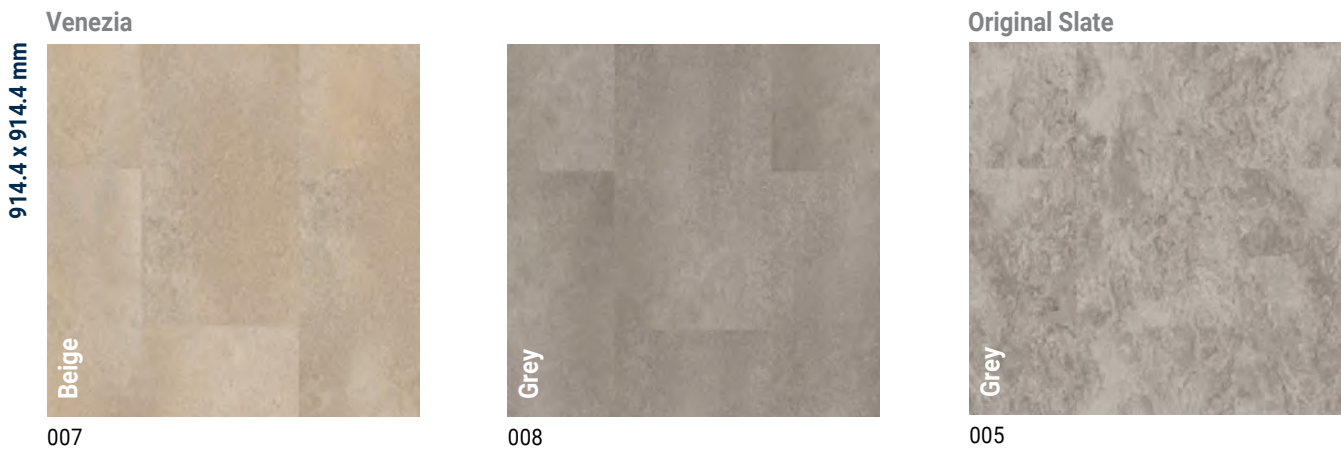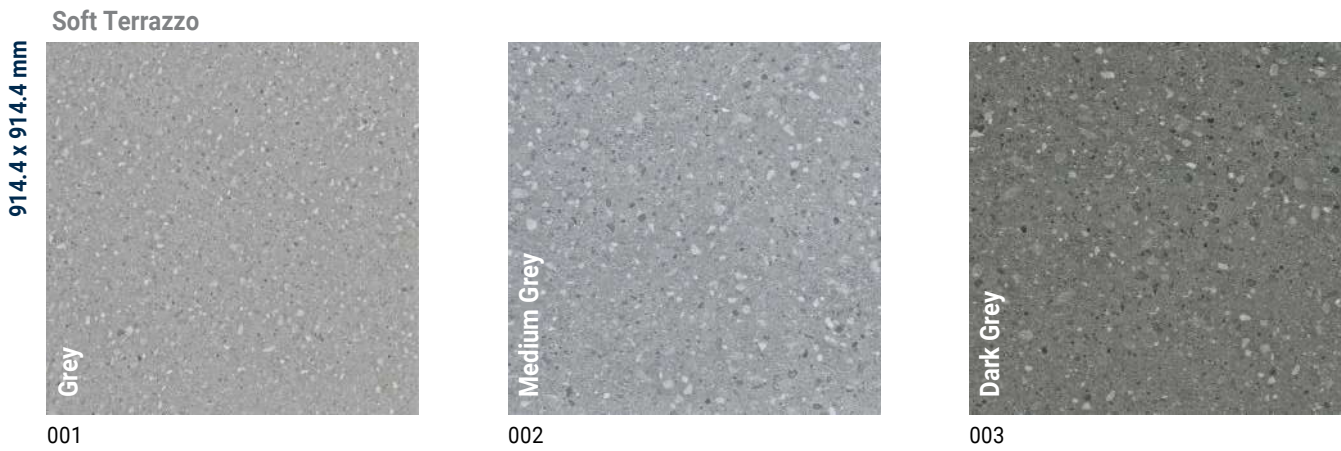

CLASSY OAK



This very pure and calm wood design is perfect to create exciting ambiances, based on a timeless, yet contemporary design.

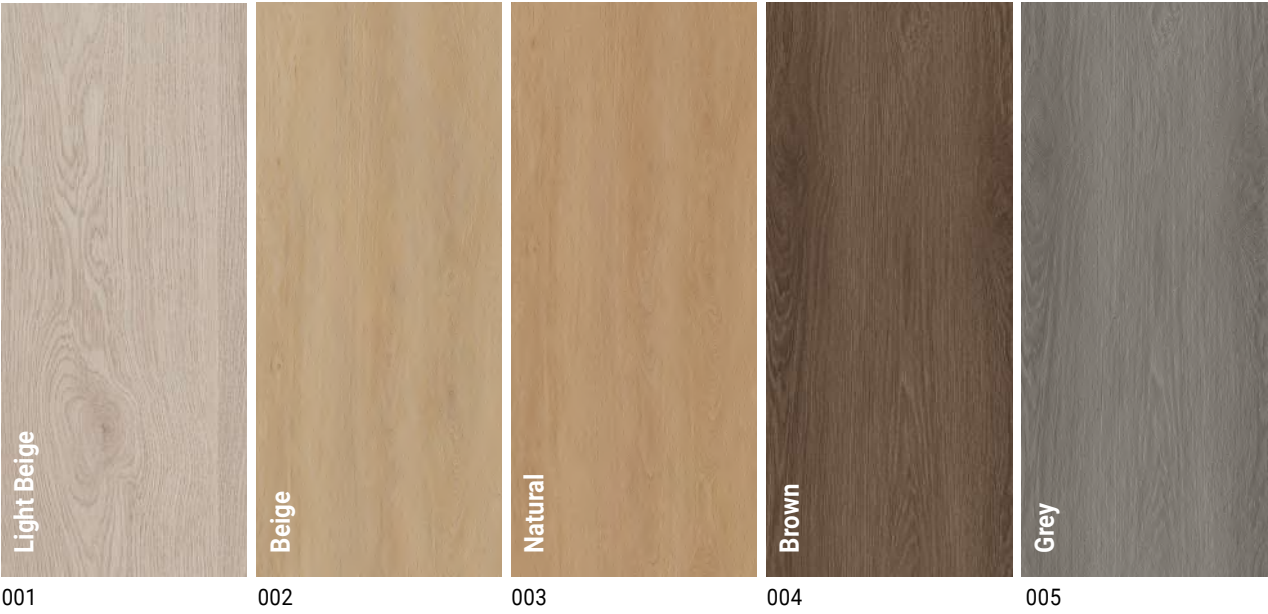

CLASSY OAK
NATURAL / GREY
003 / 005

SOFT OAK

Soft Oak is a very elegant and appealing wood design inspired by the distinctive knots, grain and texture of oak for a beautiful organic feel.

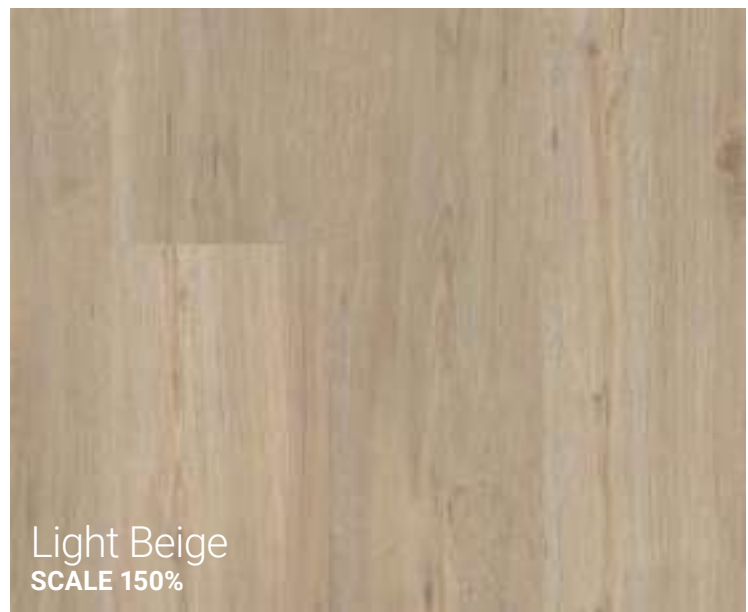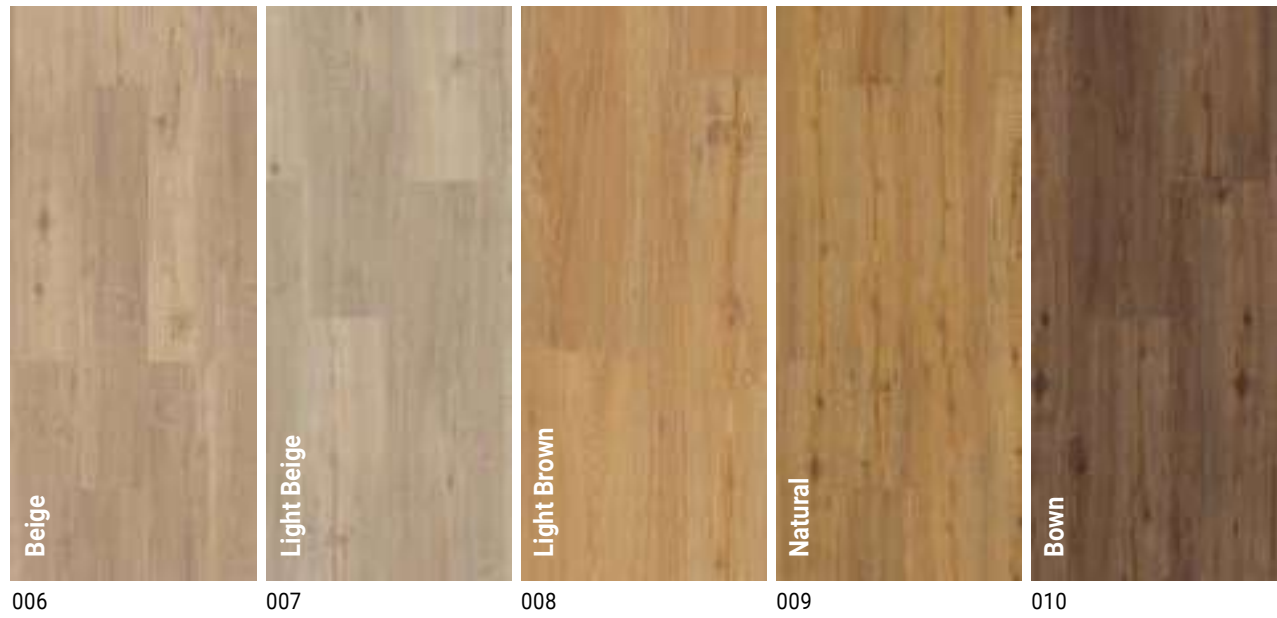

PRIMARY PINE

Nature is evermore present in all minds. With its soft hues and small knots, Primary Pine lends an air of softness and purity to the interior.




011



PRIMARY PINE / VENEZIA
Natural / Beige
011 / 007

SOFT TERRAZZO


Full of heritage and history, Soft Terrazzo brings back the old ways of handcrafted flooring. The small colour inlays create exciting all-over patterns.

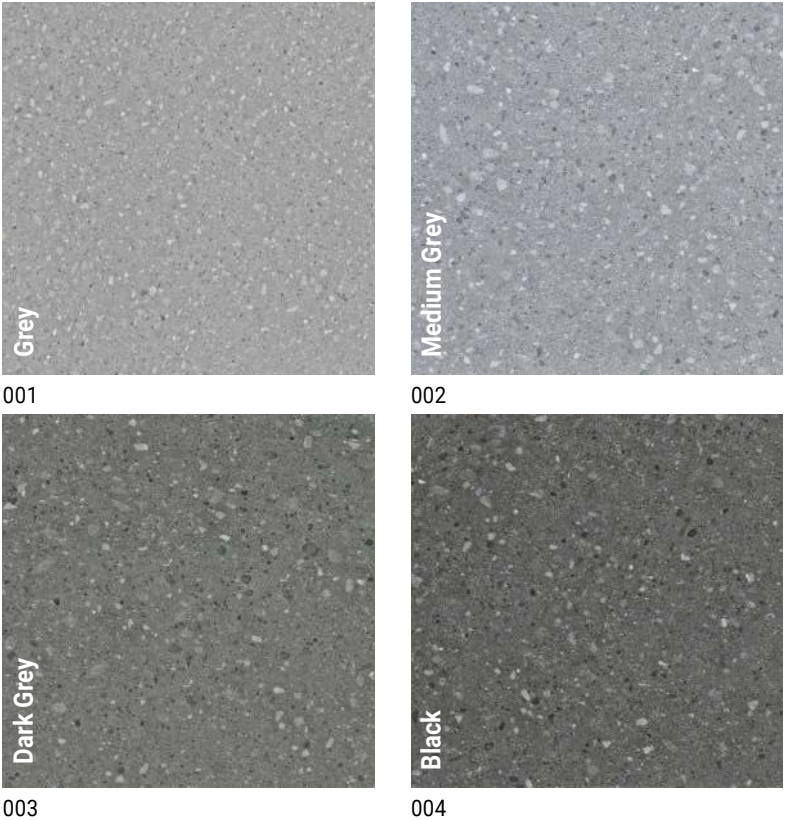


SOFT TERRAZZO
Medium Grey / Black
002 / 004

TERRAZZO

Terrazzo is now everywhere! This terrazzo look has been designed very delicately to create a simple and soft result. Its multicolored surface can be paired with any other flooring.

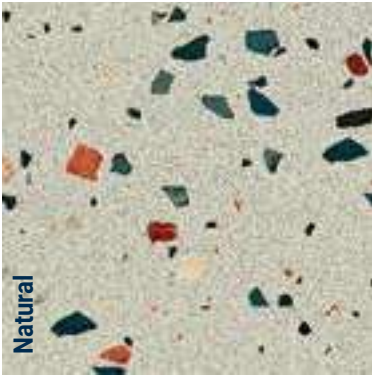


009

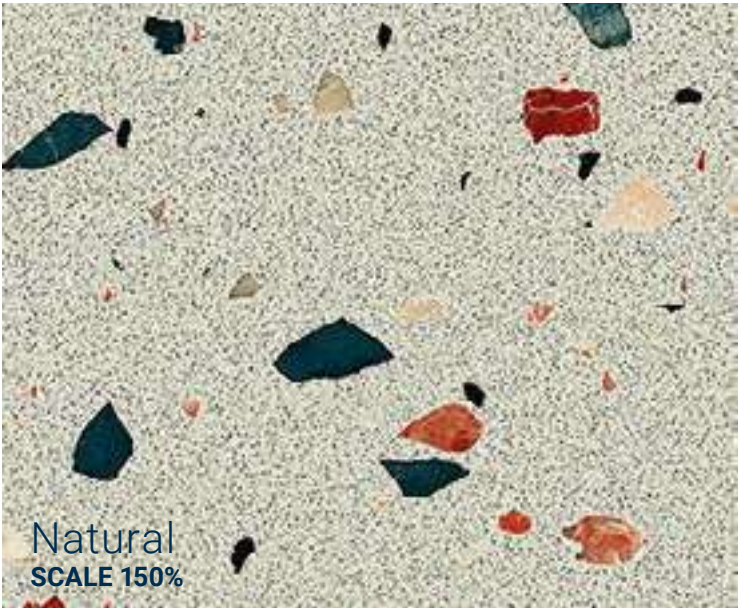


TERRAZZO
Natural
009

CEMENT

Appearing in trendy retail spaces, upscale offices and dining establishments, Cement is the flooring material of choice for no other material can be that classic and modern at the same time.

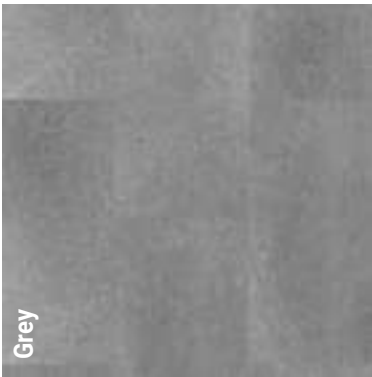

006

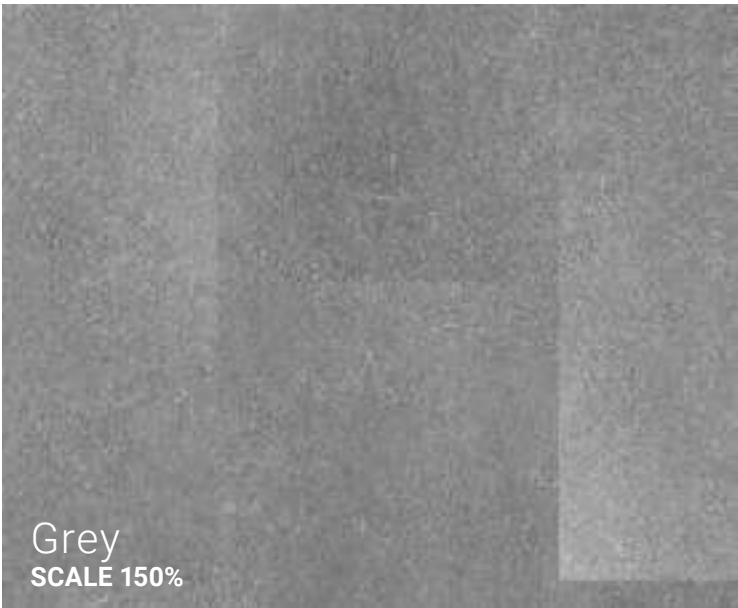

CEMENT
Grey
006

VENEZIA

Appearing in trendy retail spaces, upscale offices and dining establishments, Cement is the flooring material of choice for no other material can be that classic and modern at the same time.



007



008



ORIGINAL SLATE

Designed to mimic a real slate floor, Original Slate adds a modern industrial look with a beautiful finish. It blends well with wooden furniture, offering unique and unconventional ambiances.



005



ORIGINAL SLATE
Grey
005



Classy Oak NATURAL 003 / GREY 005



Classy Oak BEIGE 002 / Soft Terrazzo DARK GREY 003







Technical Datasheet

Technical Data	Standards	iD Spesso 55	iD Spesso 70	Square Set 55	Square Set 70
Classification	EN ISO 10582	Heterogeneous PVC floor covering			
	EN ISO 10874	Domestic : 23 Commerical : 33	Domestic : 23 Commerical : 34	Domestic : 23 Commerical : 33	Domestic : 23 Commerical : 34
Wear Layer binder content	EN ISO 10582	Type I			
Technical characteristics					
Total thickness	EN ISO 24346	5.00 mm	5.00 mm	4.00 mm	4.00 mm
Wear layer thickness	EN ISO 24340	0.55 mm	0.70 mm	0.55 mm	0.70 mm
Total weight	EN ISO 23997	9000 g/m²	9100 g/m²	7600 g/m²	7700 g/m²
Bevelled edges	-	Microbevels			
Surface treatment	-	Yes – TopClean XP			
Form of delivery	EN ISO 24342 Plank (1219.2 x 228.6 mm)	5 planks / box (1.39m²) 72 boxes/pallet (100.33 m²)		6 planks / box (1.67m²) 78 boxes/pallet (130.42 m²)	
	Tile (914.4 x 914.4 mm)	3 tiles / box (2.51m²) 46 boxes/pallet (115.38 m²)		3 tiles / box (2.51m²) 46 boxes/pallet (115.38 m²)	
Technical performance					
Dimensional stability	EN ISO 23999	≤ 0.25 %			
Curl resultant to heat 6h at 80 °C (mm)	EN ISO 23999	≤ 2.00 mm			
Reaction to fire	EN 13501-1	Bfl-s1			
Residual Indentation	EN ISO 24343-1	≤ 0.10 mm		≤ 0.20 mm	
Castor chair	ISO 4918 (EN 425)	No damage			
Furniture leg	EN 424	No damage			
Light fastness	EN ISO 105-B02	≥ 6			
Resistance to chemicals	EN ISO 26987 (EN 423)	Good resistance			
Slip resistance	DIN 51130 EN 13893	R9 μ ≥ 0,30			
Underfloor heating	-	Suitable – max. 27°C			
VOC emission	ISO 16000	Gold (≤ 100 µg/m³)			
Recyclable	-	100%			
Plasticizer	-	Phthalate-free			
Commercial warranty	-	10 years			
Colours	-	Wood: 11 Stones / Ceramic: 9			

The above information is subject to modification for the benefit of further improvement (01/2024).
For the latest information, please visit our website: www.tarkett-asia.com
Tarkett's instructions regarding installation, cleaning and maintenance should be observed.



Classy Oak BROWN 003



Contact: saleshk@tarkett.com
More information on: www.tarkett-asia.com



iD Elegance Compact 55

LUXURY VINYL TILES

A great variety
of elegant
designs for
commercial
areas



BRING THE ELEGANCE TO YOUR PROJECT

With 11 different designs and a 0.55mm wear layer, iD Elegance Compact 55 is the perfect solution for classy high traffic areas! It includes a wide range of realistic woods to bring authenticity and a sense of home-feeling to workplace areas. Cement and slate designs are a great solutions for modern and industrial interiors.



GREAT VARIETY OF DESIGNS AND FORMAT

- 11 colours options in 2 formats that you can combine
- Infinite installation possibilities: ashlar, herringbone, monolithic...
- Realistic embossing that recreates the look and feel of wood, stone and cement



GREAT RESISTANCE AND EASY CLEANING

- 0,55 mm Wear Layer suitable for high traffic commercial areas
- Hygienic surface treated with the Tarkett unique TopClean XP coating that strengthens it, extends the life-cycle and simplifies cleaning and maintenance.
- 100% matte finish



A SUSTAINABLE SOLUTION

- Total VOC emissions are at least 10 times lower than Europe's strictest standards.
- Floorscore certified
- Enable to win credits in LEED & WELL green buildings
- Uses a phthalate-free technology, based on alternative plasticizers that can be used for sensitive applications such as the production of toys, food packaging and medical devices.
- 100% recyclable.



This soft oak pattern is fulfilling nearly every demand. A coordinated range of 6 colours from light to dark, allows mixing and matching within the range. By combining those colours you are able to create unique floor plans with a sophisticated look and feel.

Rough Concrete is neutral but exiting at the same time. The embossing is highlighting the colour coordinated design and delivers a cool and contemporary atmosphere.

THE RANGE

Soft Oak

22.9 x 121.9 cm



White
256069 030



Beige
256069 025



Light Brown
256069 027



Light Grey
256069 028



Natural
256069 029



Brown
256069 026

Primary Pine

22.9 x 121.9 cm



Natural
256069 034


Walnut



Light Brown
256069 036


Cement

91.4 x 91.4 cm

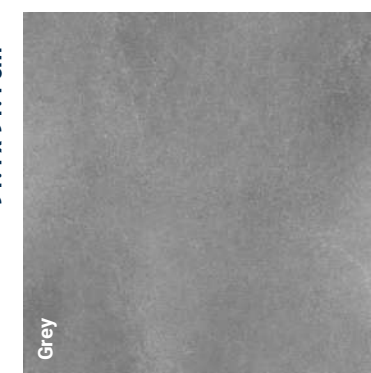


Grey
256067 010

Venezia

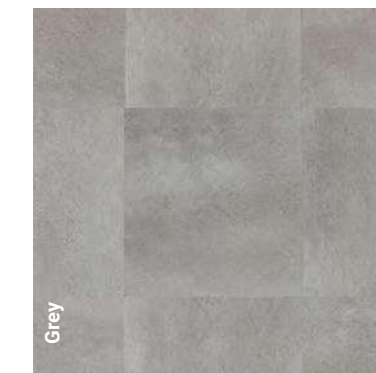

Grey
256067 002

Terazzo

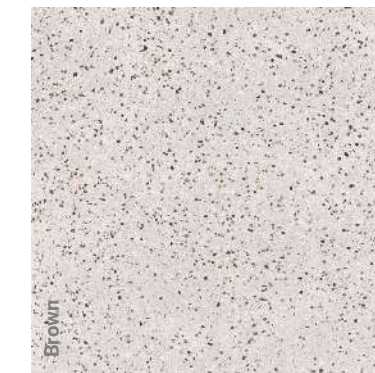

Brown
256067 015



iD Elegance Compact 55

TECHNICAL DATA

Classification	Standards	iD Elegance Compact 55
Classification	EN ISO 10582:2010	Heterogeneous PVC Compact floor covering
	EN ISO 10874	Domestic: 23 Commercial: 33 Industrial: 42
Wear Layer binder content	EN ISO 10582	Type I
Technical characteristics		
Total thickness	EN ISO 24346	2,3 mm
Wear layer thickness	EN ISO 24340	0.55 mm
Total weight	EN ISO 23997	3857 g/m²
Bevelled edges	-	No
Surface treatment (PUR)	-	Yes – TopClean XP
Form of delivery	EN ISO 24342	
	Planks	22.86 x 121.92 cm 12 planks / box (3.36m2), 80 boxes/pallet (268.80 m2)
	Tiles	91.44 x 91.44 cm 4 tiles / box (3.34m2), 50 boxes/pallet (167 m2)
Technical performance		
Dimensional stability(%)	EN ISO 23999	≤ 0.25 %
Curl resultant to heat 6h at 80°C (mm)	EN ISO 23999	≤ 2.00 mm
Reaction to fire	EN 13501-1	Bfl-s1 glued over A2fl or A1fl substrate (concrete)
Residual Indentation	EN ISO 24343-1 (EN 433)	Required value: ≤ 0.10 mm
		Average measured value: 0.03 mm
Furniture leg	EN 424	No damage
Castor chair	ISO 4918 (EN 425)	No damage
Thermal resistance	EN ISO 10456	0.03 m2. K/W
Underfloor heating	EN ISO 10456	Suitable – max. 27°C
Impact sound reduction	EN ISO 140-8 EN ISO 717/2	ΔLw = 2 dB
Light fastness	EN ISO 105-B02	≥ 6
Resistance to chemicals	EN ISO 26987 (EN 423)	Good resistance
Slip resistance	DIN 51130	R9
	EN 13893	
Electrical properties	EN 1815	< 2 kV on concrete R1 > 1010 Ω
	EN 1081	
Colours	-	Wood: 8 - Ceramic: 3

The above information is subject to modification for the benefit of further improvement.
For the latest information, please visit our website: www.Tarkett-asia.com
Tarkett's instructions regarding installation, cleaning and maintenance should be observed.



iD Elegance Compact 55 Soft Oak Beige and Venezia Grey





More information on: www.tarkett-asia.com



Heterogeneous vinyl

OMNISPORTS





WHY CHOOSE TARKETT SPORTS	4
HOW TO CHOOSE YOUR SURFACE?	6
SOLUTION GUIDE.....	8
WHY CHOOSE OMNISPORTS?	10
LEISURE FLOORINGS	12
SPORTS FLOORINGS.....	14
CHOOSE YOUR COLOURS.....	16
3 INSTALLATION POSSIBILITIES	18
OUR COMMITMENT TO CLEANLINESS	20
OUR EXPERTISE AT YOUR SERVICE	22
OUR COMMITMENT TO THE PLANET	24
A TURNKEY SOLUTION	26
SOME OF OUR REFERENCES	28
PRODUCT LISTING	30
TECHNICAL DATA	31



IS A WORLD LEADER IN ATHLETIC SURFACES,
OFFERING COMPLETE SOLUTIONS OF INDOOR AND OUTDOOR SPORTS FLOORINGS,
THROUGH ITS MULTIPLE OF OWN BRANDS.

OUR MISSION: OFFER SUSTAINABLE SPORTS SURFACES
THAT MAKE THE DIFFERENCE FOR ATHLETES, IN PUBLIC AND PRIVATE FACILITIES.



A EUROPEAN MANUFACTURER

Tarkett Sports is a French group with our head office based in Paris - La Défense. Our solutions are manufactured in our technologically advanced European factories: Vinyl and Synthetic turf (France), Linoleum (Italy), Wood (Sweden).



AN INNOVATIVE LEADER

Inventor of synthetic turf systems: 3G, Core fibre, ProMax Hydroflex, PureGrain corn infills, the intelligent Genius system and Omnisports vinyl with the exclusive GreenLay™ installation method.



A NETWORK OF EXPERTS

Tarkett Sports works with its teams and the most experienced and competent local partners in the industry, for the design and installation of your sports facilities.



A SUSTAINABLE LEADER

Our solutions help to create pleasant sports areas in a healthier environment, thanks to permanent innovations in product design, environmental friendly factories and end of life recycling programmes.



AN EXPERIENCED LEADER

Almost 100 million sqm installed, more than 20,000 sites in the world and as many satisfied customers.



A LEADER AT YOUR SERVICE

We are as committed to your project as you are. When you choose Tarkett Sports, you choose a company that knows how to take care of you and the players.




PATRICK FIOLEAU
ARCHITECT - ATOME AGENCY



«We frequently choose Tarkett Sports products for their versatility and adaptability across various sports.»

XAVIER FABRE
SPORTS DEPARTMENT - VILLEURBANNE




«Our maintenance teams are particularly pleased with Tarkett Sports' flooring in Astroballe hall. After more than 10 years, the facility is still in perfect condition and many European clubs asked how we did to have such high quality wood flooring!»

RICHIE GRAY
COACH AND MANAGING DIRECTOR MONTPELLIER - HERAULT RUGBY




«Partnering with Fieldturf® was an easy decision for me and my company. Having experienced their product first-hand and understanding Tarkett Sports commitment to innovation and customer service, makes this an exciting opportunity.»

LEE JACKSON
GARDEN KEEPER MANCHESTER CITY



«Thanks to the efforts of a motivated team and an hybrid turf system, we now have one of the best fields in the English Premier League. The GrassMaster system allows us to keep draining playing surface, stable and homogeneous.»

1 CHOOSE THE SURFACE ADAPTED TO YOUR USAGE

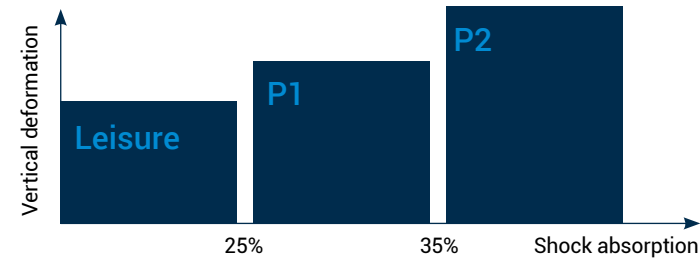

- Leisure** - All types of players
Ideal for fitness, leisure and wellness facilities
Best option: Omnisports Compact, Speed & Training
- P1** - Light to medium weight players
Ideal for school, leisure and extra sportive use
Best option: Omnisports Reference *Multi-use*
- P2** - All types of players
Ideal for competition, frequent and intense trainings
Best option: Omnisports Active+ & Pureplay


2 ENSURE PLAYERS' SAFETY

The single surface embossing combined with TopClean XP™ treatment provides the proper balance of friction and grip control, whatever the colour or design.

“

Tarkett sports difference

No change in grip and underfoot feeling when moving from solid to pattern

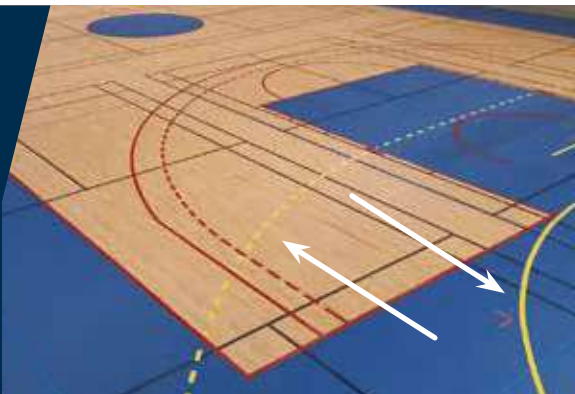

3 MAKE SUSTAINABLE CHOICES

Tarkett Sports is committed to an environmental strategy based in particular on qualitative components choice to design its products, users' health and well-being, as well as materials reuse. Our Omnisports products are:

- Recyclable post-use*
- Contain recycled content up to **32%**
- ReStart® ready

4 CHOOSE HEALTHIER INDOOR SPACES

Indoor air quality is essential for athletes' health and especially children who are exposed to higher risk of indoor pollution due to immature lungs.

That's why choosing a sports flooring made from carefully selected materials that contributes to better indoor air quality is key for any project. Our Omnisports products feature the following:

- Extremely low VOC emissions <10µg/m³
- Phthalate-free
- Biocide-free
- Approved by the Seal of Approval of Allergy UK

5 SECURE YOUR INVESTMENT ON THE LONG TERM

Sports facility projects entail significant investments that require a reliable safeguard. With its expertise, know-how and worldwide reputation, Tarkett Sports is confident in its products and is committed to guaranteeing them for 15 years. Experience the industry's highest and non-degressive warranty for your peace of mind.



6 MANAGE YOUR COSTS

On average, the overall investment budget for a flooring system is divided into 20% for its purchase and 80% for its maintenance. This is why it is crucial to carefully select a high-quality sports flooring that is easy to maintain and has a reliable installation method, as part of the GreenLay™ method, which is more cost-effective:

- Minimised installation down-time: 20% faster installation
- Minimised installation costs: with only 2% of the surface glued
- Simplified maintenance thanks to our ToP Clean XP™ surface treatment and exclusive surface embossing across our entire Omnisports range



- Highly recommended
- Highly recommended with Lumaflex sub-construction
- Suitable

	OMNISPORTS								
	LEISURE FLOORINGS					EN14904 CERTIFIED FLOORINGS			
	COMPACT 2.0 MM	SPEED 3.45 MM	SPEED TABLE TENNIS 3.45 MM	DANCEFLOOR 3.45 MM	TRAINING 5.0MM	REFERENCE MULTI-USE 6.2 MM	ACTIVE + 8.1 MM	PUREPLAY 9.4MM	
	p. 12	p. 12	p. 12	p. 12	p. 12	p. 14	p. 14	p. 14	
 Multi-sports						●	●	●	
 Multi-use	○					●			
 Basketball						●	●	●	
 Volley-ball						○	●	●	
 Handball						○	●	●	
 Futsal						●	●	●	
 Table tennis			●			●			
 Badminton						●	●	●	
 Fitness - aerobics		●			●	●	●		
 Fitness - cardio (bikes, tradmills, rowing machines,...)	●	●							
 Wellness centres		●			●	●			
 Handisports	○					○			
 Ballet dance				●					
 Yoga					●	●	●	●	
 Tai Chi					●	●	●	●	
 Traffic areas (corridors, entrance halls, meeting rooms,...)	●								



X3LT EXCLUSIVE TECHNOLOGY

“

GLASS VEIL

Less is more!
Extremely tough
single glass
veil reinforcement

2X

BETTER IDENTATION
RECOVERY THAN
SIMILAR PRODUCTS

+

“

CALENDARED SHEET

High performance &
durability, made from
recycled material

Up to
60%
RECYCLED CONTENT

+

“

XCS FOAM

High expansion rate
and recovery, less fillers
for maximized
performances

+12%*
IMPROVED
SHOCK ABSORPTION

WITH OMNISPORTS X3LT YOU CAN FEEL THE DIFFERENCE!



1

PROTECTION LAYER

OMNISPORTS IS BACKED WITH A SINGLE SURFACE EMBOSSING
COMBINED WITH TOPCLEAN XP™ SURFACE TREATMENT

- Consistent surface feel and friction, whatever the colour or design!
- Perfect balance of friction and grip control
- Easy and cost-effective maintenance



2

WEAR LAYER

PUR VINYL WEAR LAYER, 30% THICKER THAN EQUIVALENT PRODUCTS IN
THE MARKET

- Increased durability
- High mechanical resistance
- Optimal stain resistance

3

DESIGN LAYER

HIGH-DEFINITION PRINTING FOR HIGHER COLOUR INTENSITY AND REALISTIC
WOOD SURFACE APPEARANCE

- Endless design possibilities: Learn more about Omnisports design options
page 16.

4

PERFORMANCE LAYER

OMNISPORTS X3LT TECHNOLOGY

- Boosted sports experience allowing longer and safer play time
for both recreational and competitive activities
- Continuous performance for product lifespan**
- Suitable for multi-purpose activities





OMNISPORTS **COMPACT** 2.0 MM

Ideal for traffic areas and cardio equipment in fitness facilities

- Withstands heavy traffic
- Equipment-friendly: excellent resistance to indentation marks and easy circulation of rolling loads
- Suitable for installation with Lumaflex Energy or Evolution sub-construction: area-elastic system (A4), ideal for multi-sports facilities and light multiuse purposes.



OMNISPORTS **SPEED** 3.45 MM

Ideal for walking and acoustic comfort in fitness, leisure and wellness areas

- Versatile use in leisure facilities
- Equipment-friendly: high resistance to indentation marks and rolling loads
- Comfortable walking and acoustic experience



OMNISPORTS **TRAINING** 5.0 MM

Ideal for small sports facilities and leisure areas

- Increased protection and comfort: shock absorption level >17%
- Good walking and acoustic experience
- Increased longevity



OMNISPORTS **SPEED TABLE TENNIS** 3.45 MM

Textured sports surface ideal for table tennis practice


- Balanced grip for responsive and safe game play
- Ideal for portable installation in tournaments and championships
- Comfortable and supportive underfoot feel



DANCEFLOOR 3.45 MM

The ideal solution for dance studios professional and amateur classic ballet

- Excellent grip: secure footing for precise dance movements
- Supportive surface prioritizing dancers' protection
- Perfect matte

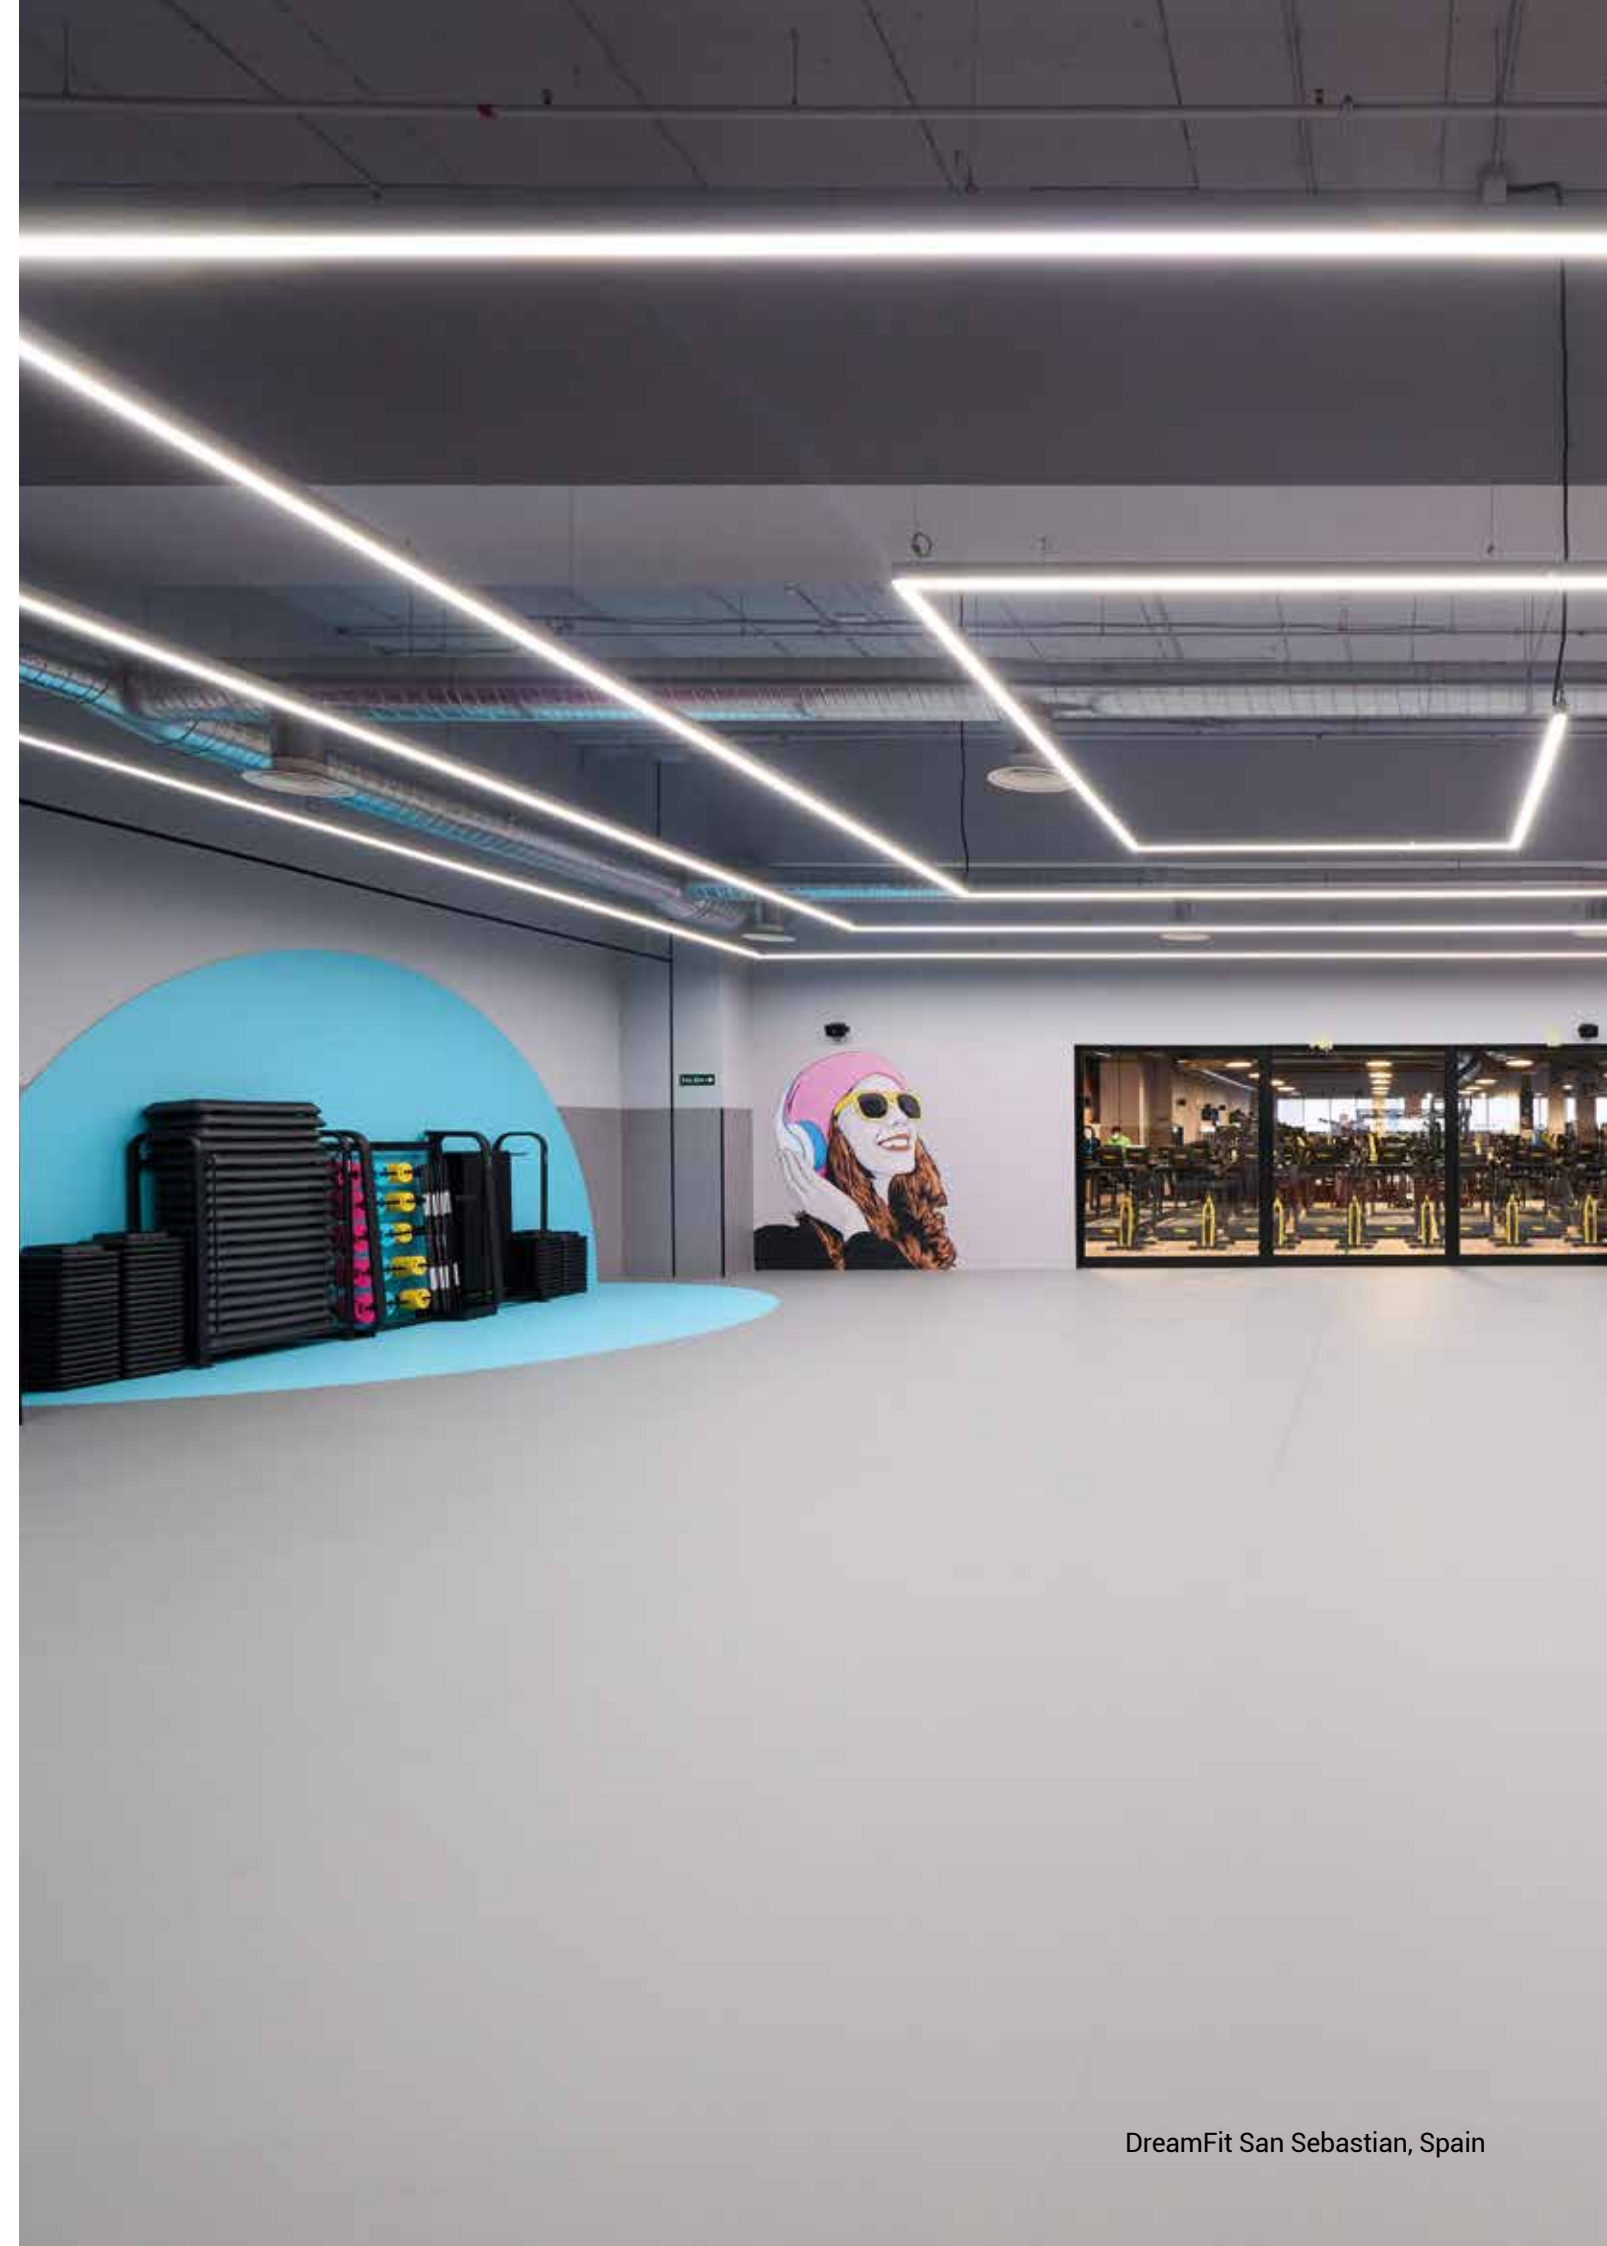

P1



OMNISPORTS REFERENCE **MULTI-USE** 6.2 MM

Ideal flooring for multi-sports practice and non sporting events

- Optimal safety and performance: shock absorption level $\geq 25\%$
- Equipment-friendly: excellent resistance to indentation marks from tables and other equipment
- Reliable for multi-use spaces, catering to a wide range of activities and events



P2



OMNISPORTS ACTIVE + 8.1 MM

Ideal balance of performance & comfort for multi-sports

- Perfect balance of performance and comfort for variety of sports: shock absorption level $\geq 35\%$
- Enhanced gameplay and training sessions with uniformly reactive surface
- Advanced foam technology for high level sports practice



P2



OMNISPORTS PUREPLAY 9.4 MM

Extreme protection, comfort and sports performances

- Advanced protection and comfort: shock absorption level $\geq 35\%$
- Excellent game experience with supportive surface
- Suitable for high level sports practice



CHOOSE YOUR COLOURS

Endless design possibilities

A LARGE PALETTE
OF 25 MODERN AND VIBRANT
COLOURS & DESIGNS

CUSTOMISED OFFER



Would you like a sports
hall with your city or club
colours?

Create your own colour
based on other Tarkett
collections or from RAL/
Pantone/ NCS proposal.

*Minimum quantity 800m²
(+/- 10% by colour)
Leadtime 7 weeks*

LIGHT REFLECTANCE VALUE (LRV)

Our Omnisports contribute to
the brightness of the spaces
and factor into the overall LRV
calculation of a sports facility.
Omnisports designs offer a
diverse selection of LRV values
with different levels of clarity,
and based on the project
criteria, they help conserve
energy by reducing artificial
lighting.



Create your
dream court
online



Sports centre, Lançon-Provence, France ©Lisa Ricciotti



Please refer to page 30 for product codes



OMNISPORTS ALLOWS 3 INSTALLATION POSSIBILITIES TO ACCOMMODATE EACH FACILITY'S PARTICULAR CIRCUMSTANCES:

1 GLUED INSTALLATION METHOD:
TRADITIONAL METHOD WITH ACRYLIC GLUE FOR DRY SUBFLOORS


2 GLUED ON TARKOLAY:
INSTALLATION METHOD WITH ISOLATING MEMBRANE FOR SUBFLOORS WITH HUMIDITY RATE UP TO 7%

3 GREENLAY™:
EXCLUSIVE LOOSE-LAY INSTALLATION METHOD FOR SUBFLOORS WITH HUMIDITY RATE UP TO 7%

GreenLay™ is a sustainable loose-lay installation method with only 2% of the surface glued offering an economical and convenient solution.

This unique method is made possible by:

- The product's outstanding dimensional stability (0.10%)
- Omnisports Reference *Multi-use*, *Active+* & *Pureplay*'s weight
- The honeycomb backing, creating a suction effect

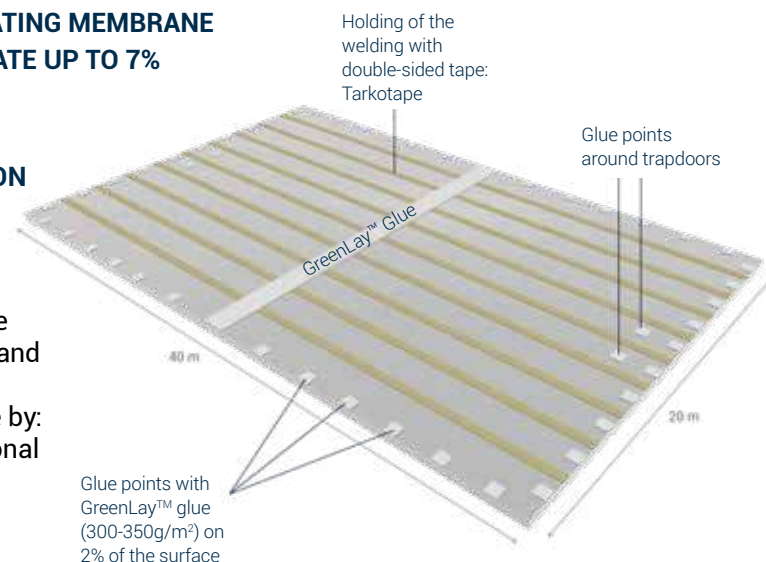

Unique 2M roll width

30% less welding required, decreasing the areas at risk of soiling.

QUICK & EASY TO INSTALL



- Reduced installation time by **20%**
- **Immediate** setting in traffic
- **Easy access to subfloor** after installation with no damage to the subfloor.

PROVEN RELIABILITY



- **EN14904** compliant
- **25 years** of experience feedback
- Over **2 millions** sqm installed
- **15 years** guarantee on Omnisports when installed following our recommended guidelines

CONVENIENT & ECONOMICAL




- Resistance to **rising moisture, up to 7%**, and heated subfloors
- Solution for **asbestos floors** covering
- **Less than 10kg** of glue required per 1000sqm
- Eligible for ReStart® program with **no recycling costs** charged to the customer*



MORE THAN 2 MILLIONS M² FOR MORE THAN 25 YEARS



EASE OF MAINTENANCE

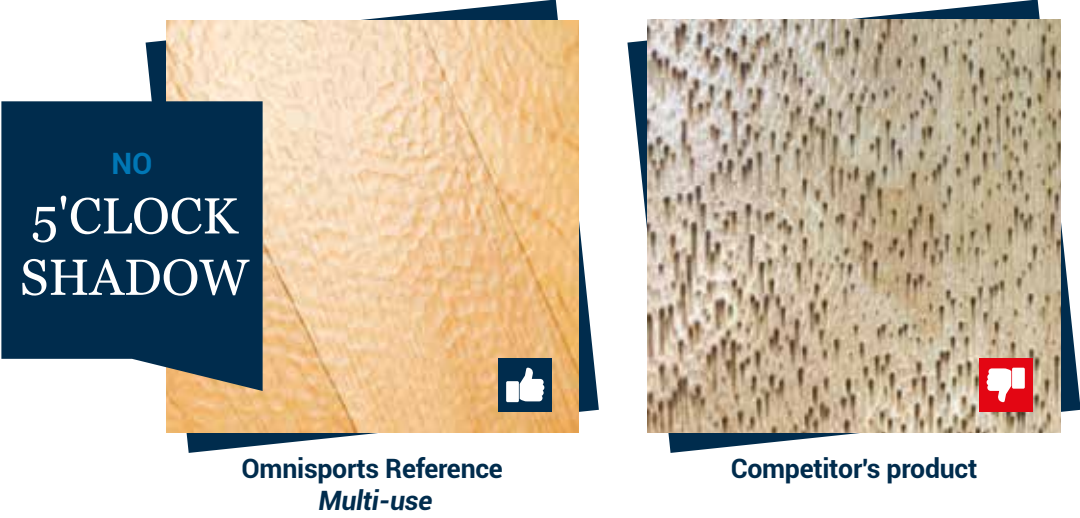

MAINTENANCE HAS NEVER BEEN EASIER
WITH OMNISPORTS SURFACE TREATMENT
TOPCLEAN XP™

Omnisports products benefit from a factory-applied polyurethane surface treatment TopClean XP™ that makes them extremely resistant to abrasion, scratches, stains, and chemicals, making them easier to maintain. Omnisports' TopClean XP™ surface treatment reduces cleaning and maintenance by simplifying the process.

ONLY
1%
OF DETERGENT
FOR ROUTINE
MAINTENANCE

DAILY MANUAL MAINTENANCE	WEEKLY MECHANICAL MAINTENANCE	PERIODICAL MAINTENANCE (only 4 times per year)
• Remove dust by sweeping.	• Remove dirt with automatic scrubber machine fitted out with a red pad and only 1% of detergent.	• Remove encrusted dirt with automatic scrubber machine fitted out with a red pad and alkaline detergent.

For more detailed technical information, please refer to maintenance guides available on our website.



VALUE YOUR JOBSITE WASTE!

RESTART®: FREE COLLECTION AND RECYCLING SERVICE

- Optimises jobsite waste management.
- Guarantees traceability of collected off-cuts.
- Integrates sustainable development and anticipates European regulation requirements.



TAILORED OFFER

ROLL LENGTH ON DEMAND

Tarkett Sports can handle your length requirement in order to give you and your project the personal attention to details you deserve:

- Available by «multiple» of 10cm
- Reduces waste
- Time saving
- Minimum quantity: 250m² (per colour)

GET THE AMOUNT YOU REALLY NEED

CUT SERVICE

- Available for all product profiles on stock rolls.
- Minimum quantity: 5m².

IMPROVE YOUR KNOWLEDGE OF INDOOR SPORTS

TAILORED TRAINING MODULES


Contact our professional and passionate training team for specific training modules that fits your needs:
training.sport@tarkett.com



**A QUESTION?
A PROJECT?**

Contact us !

Our dedicated team of passionate experts will guide you throughout your project:
info.tarkettsports.indoor@tarkett.com

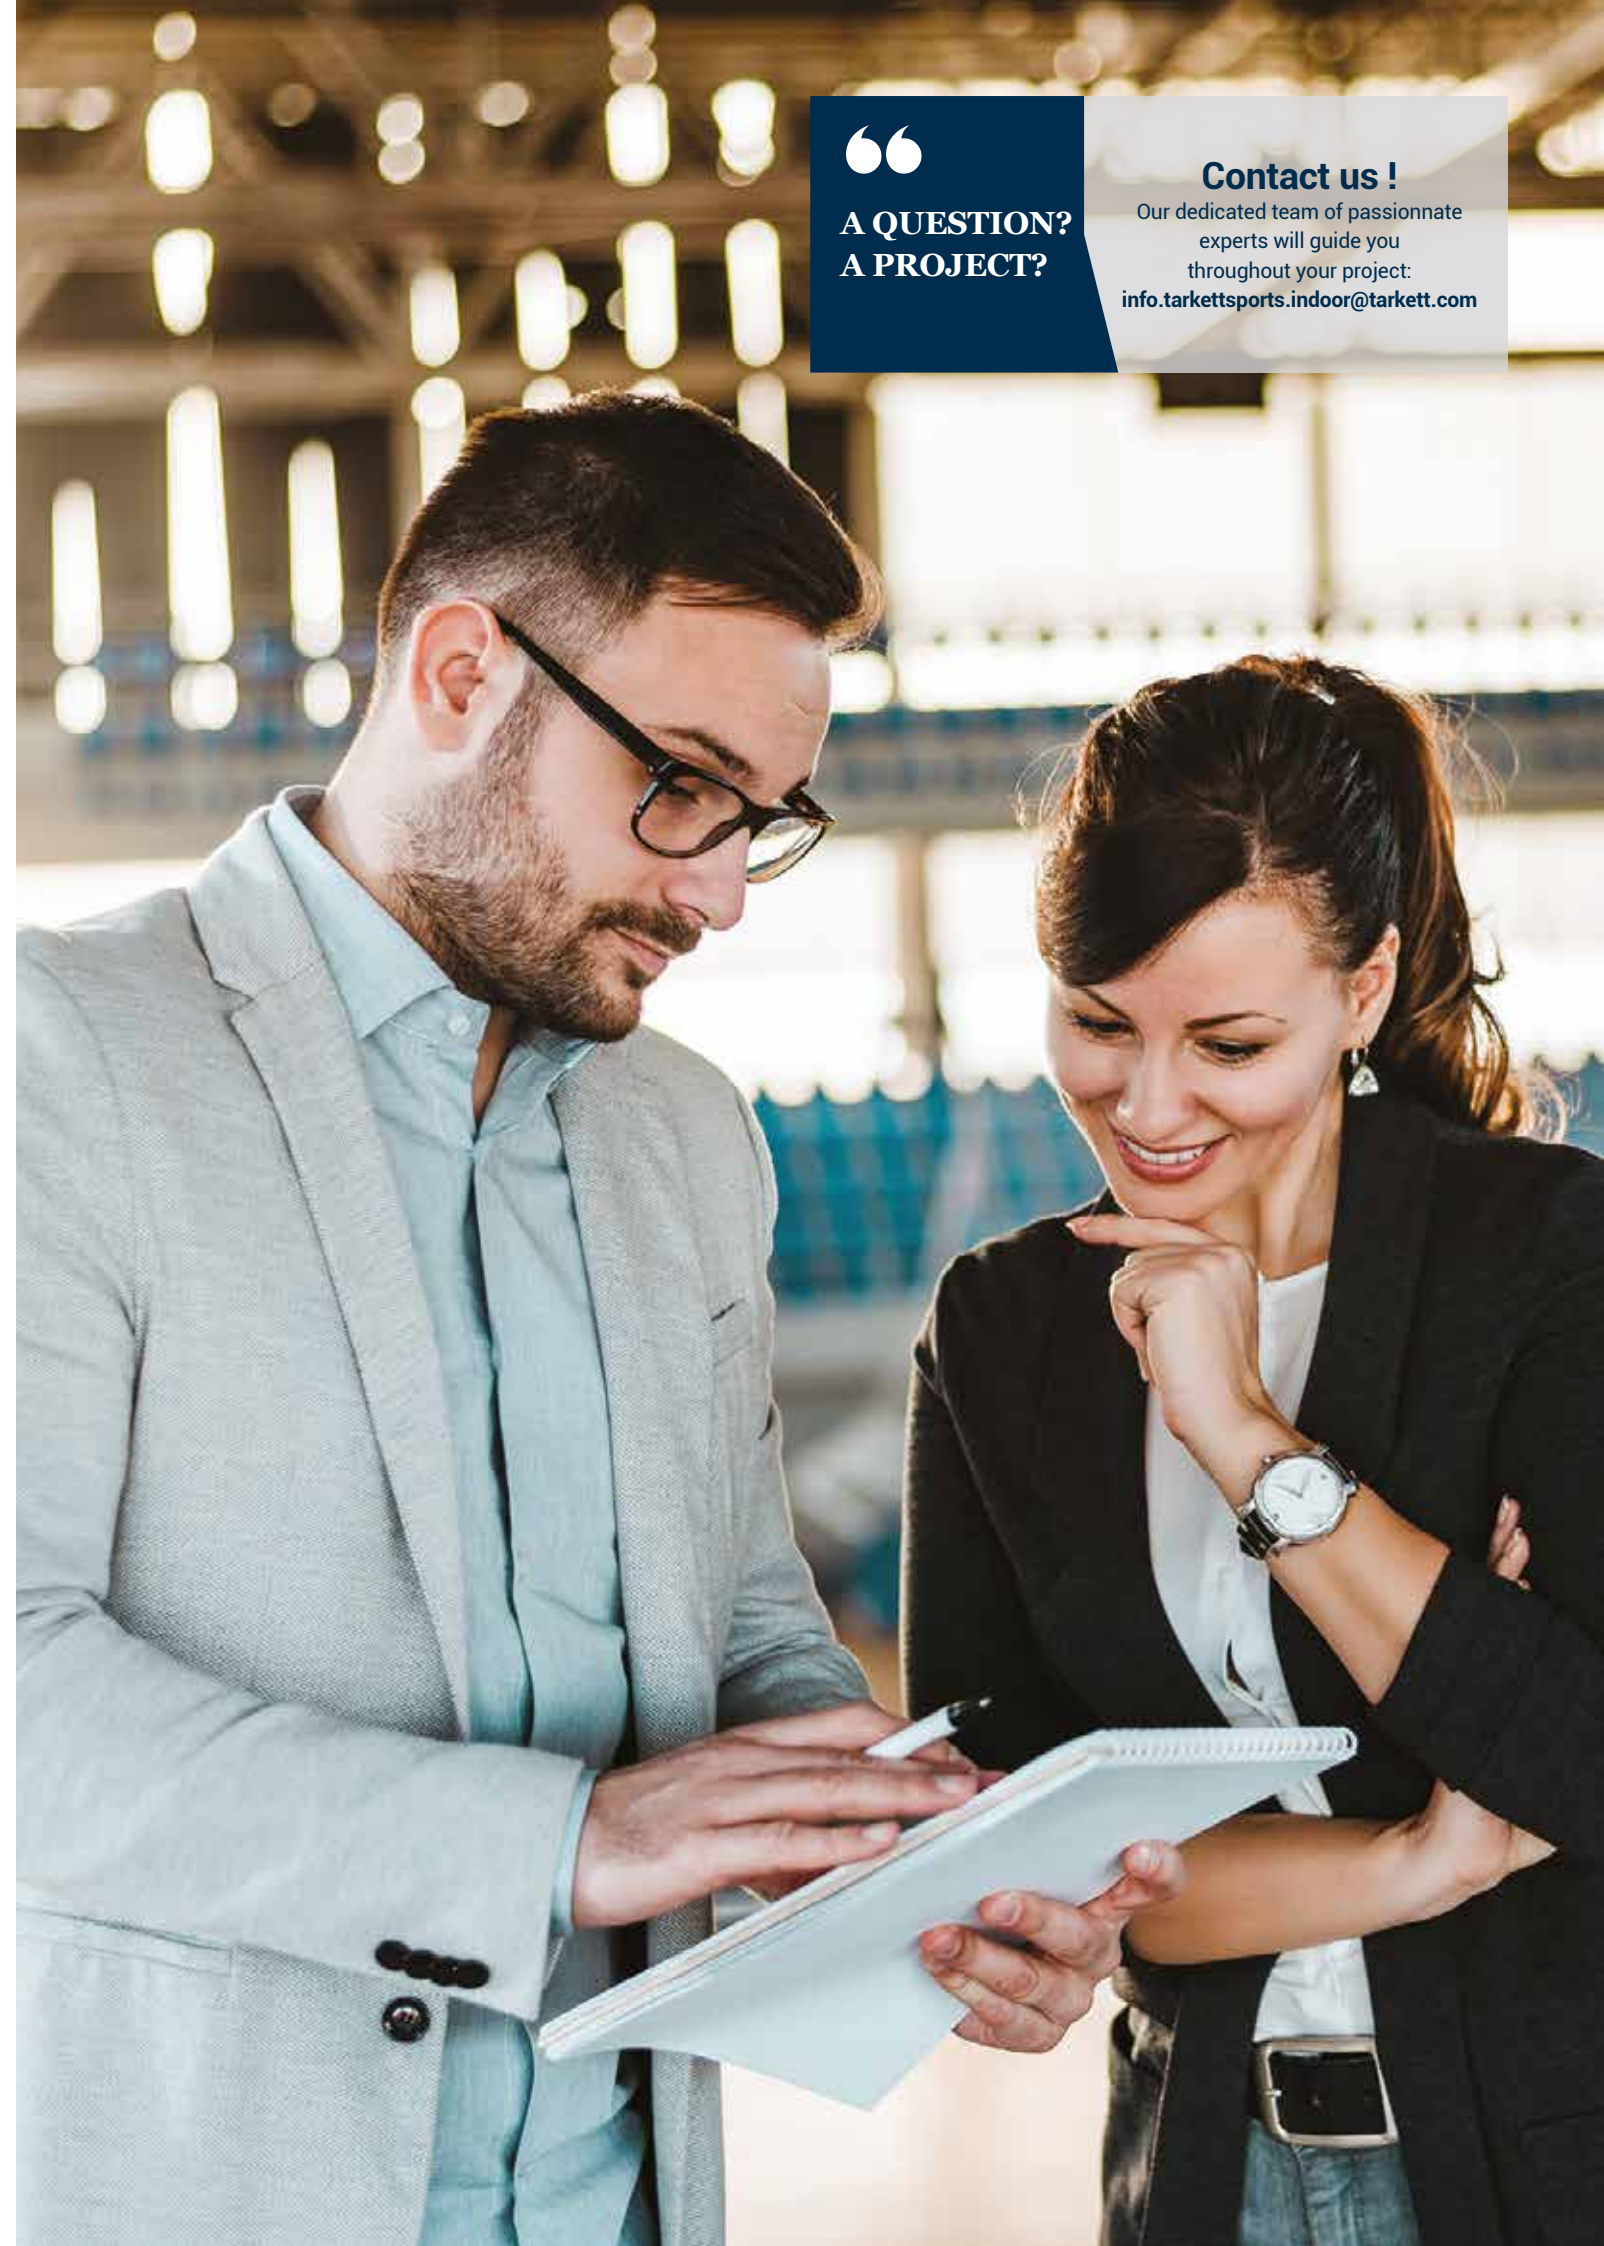

OUR ECO-DESIGN APPROACH IS FOUNDED ON THREE INTERRELATED PILLARS



CLIMATE AND CIRCULAR ECONOMY

We continuously work on closing the loop on waste, using more recycled content to preserve our planet's natural resources, and ultimately **reducing** our carbon emissions and **impact on climate change**.

- Six recycling centres and five sustainable production sites in EMEA
- Our ReStart® program offers hassle-free flooring take-back
- Recycling waste and post-use*
- Using and increasing use of recycled content in our products
- Continually working to reduce our products' carbon footprint – scope 1 to 3



GOOD MATERIALS

We offer radical transparency about our products and subject ourselves to external scrutiny so that you can be **clear on the health and environmental performance** of our flooring and confident in your choice.


- Phthalate-free and biocide-free products
- Responsible use of PVC
- Full transparency on our products' ingredients, providing third-party assessments (EPD, MHS)
- Product development following Cradle to Cradle® approach




HEALTH & WELL-BEING

Contribute to **athletes' well-being** by providing healthy sports spaces with the **highest standards of Indoor Air Quality**.

- Floorings with VOC lower than the most stringent regulations
- Asthma & allergies certifications
- Developing cleaning protocols to reduce the use of biocides and harmful chemicals

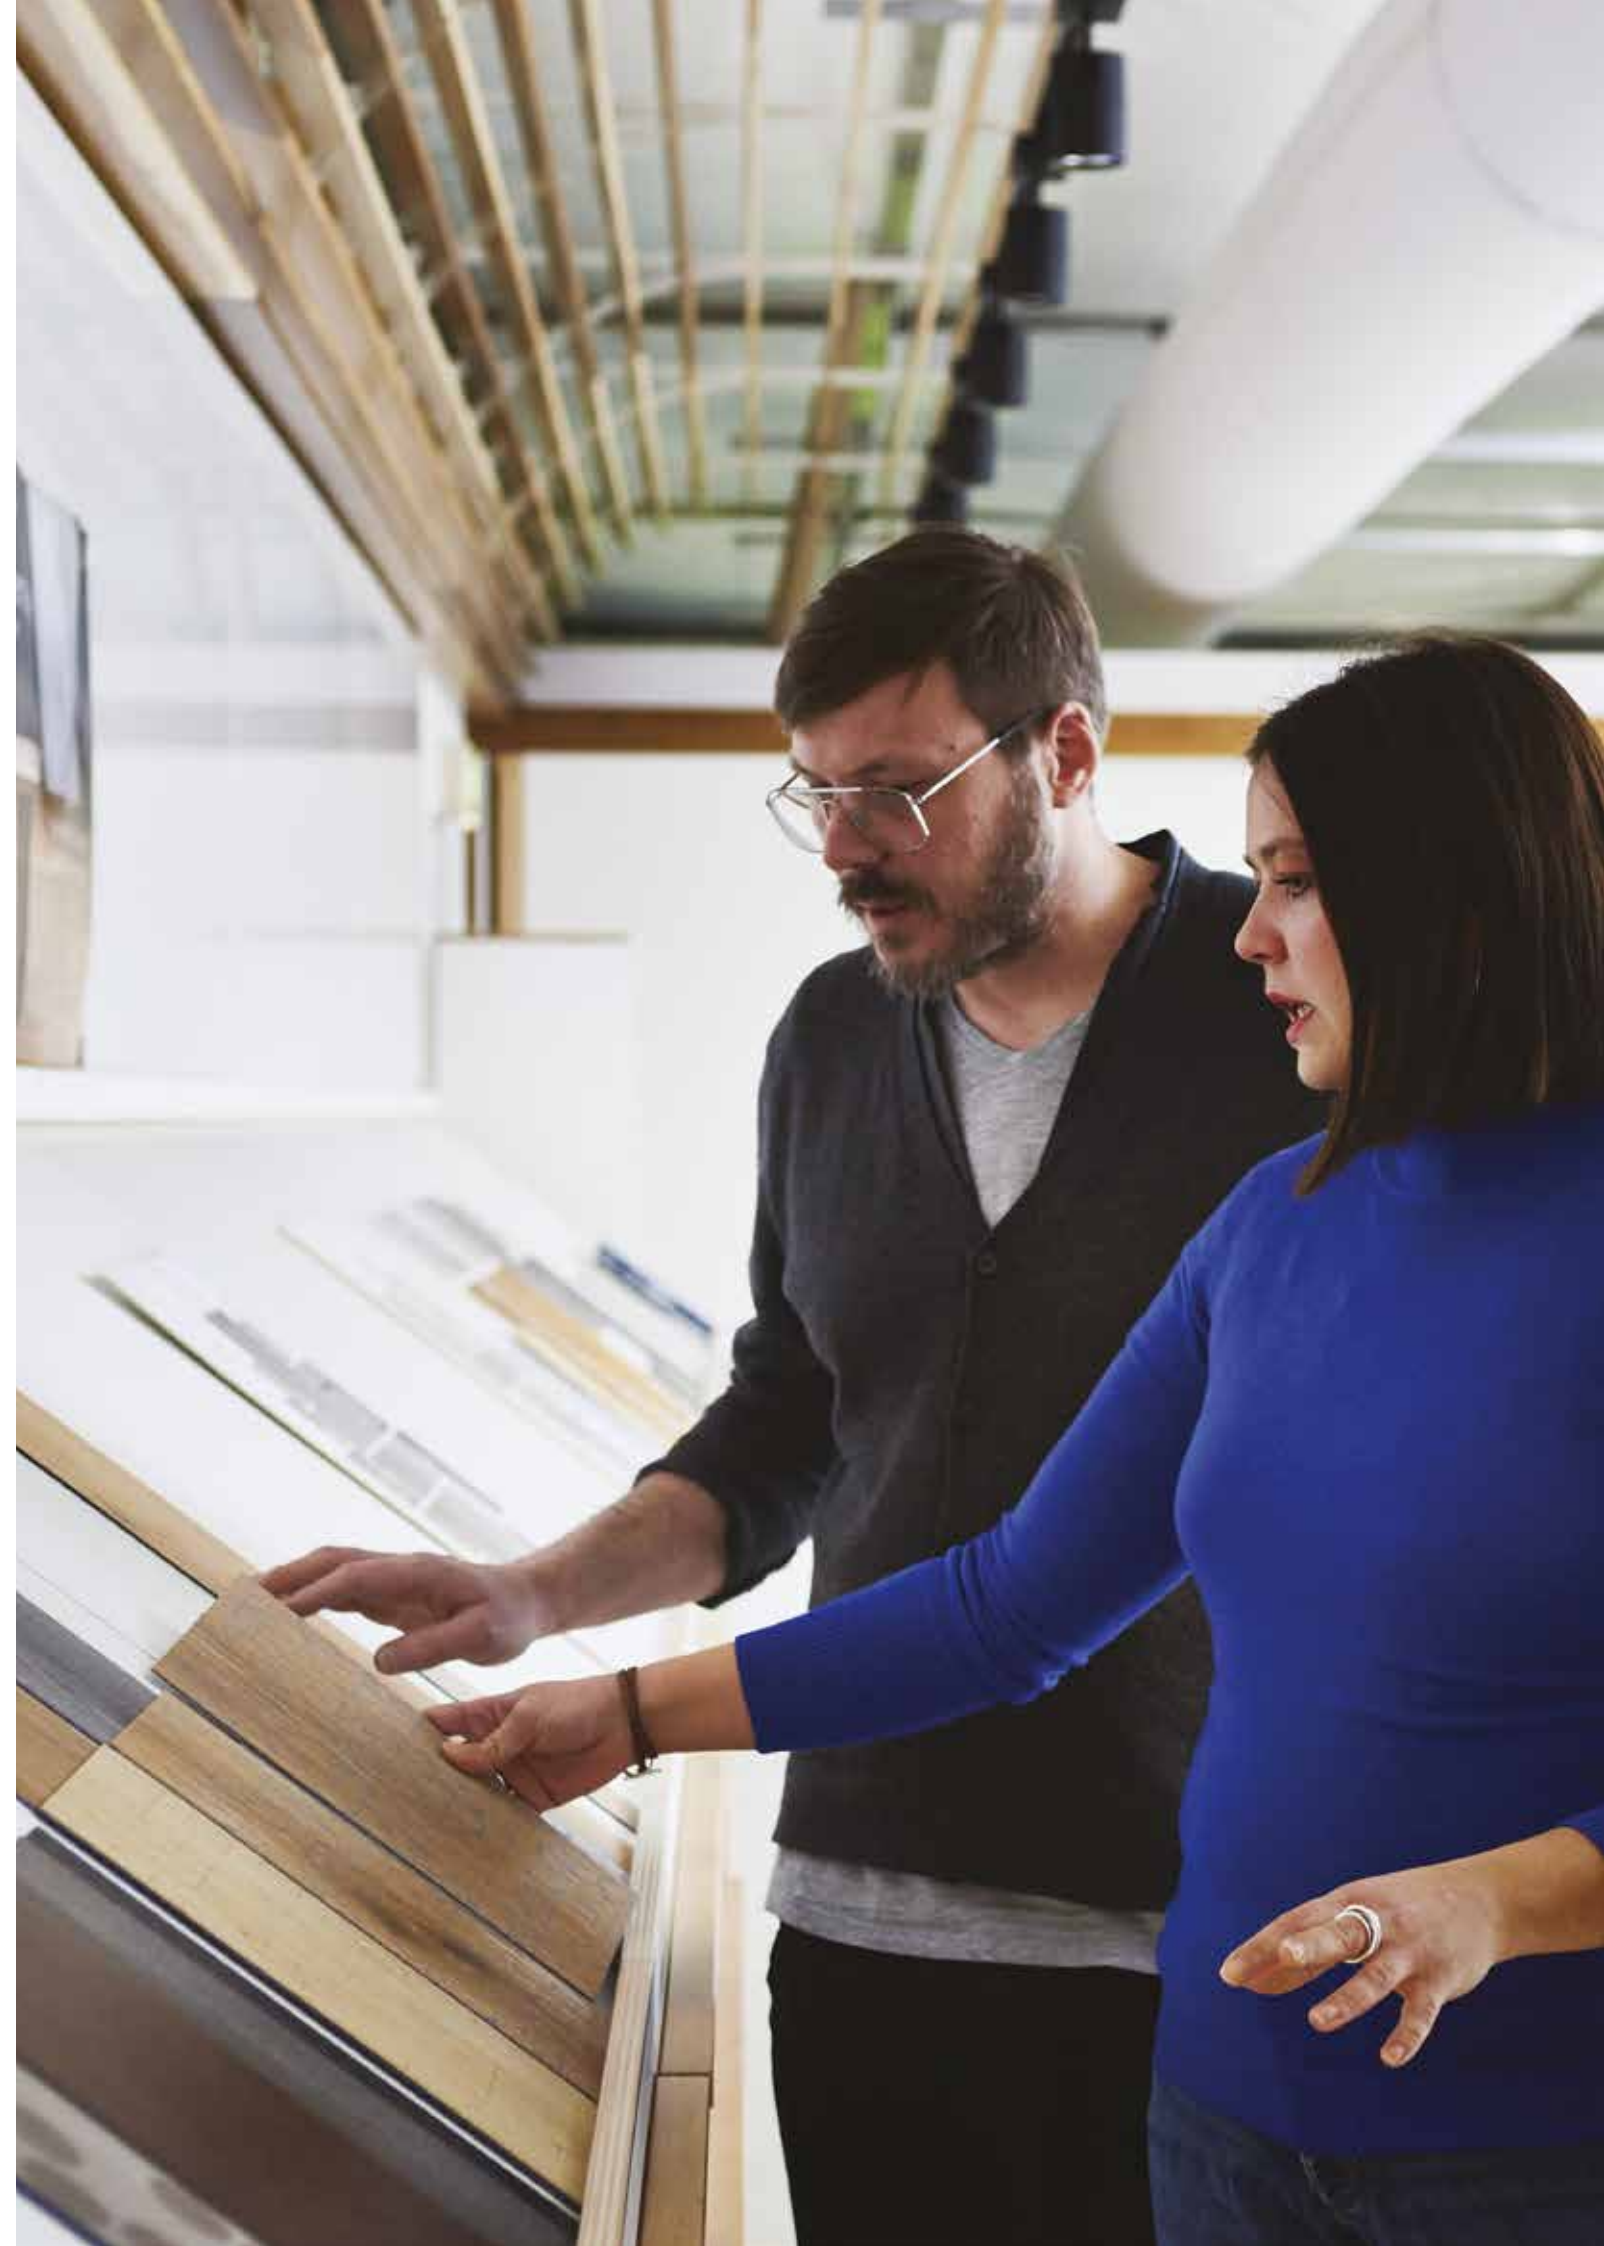

FULL SOLUTION PROVIDER
FOR ALL THE AREAS OF YOUR PROJECT
A DEDICATED EXPERT TO GUIDE
THROUGHOUT THE PROCESS

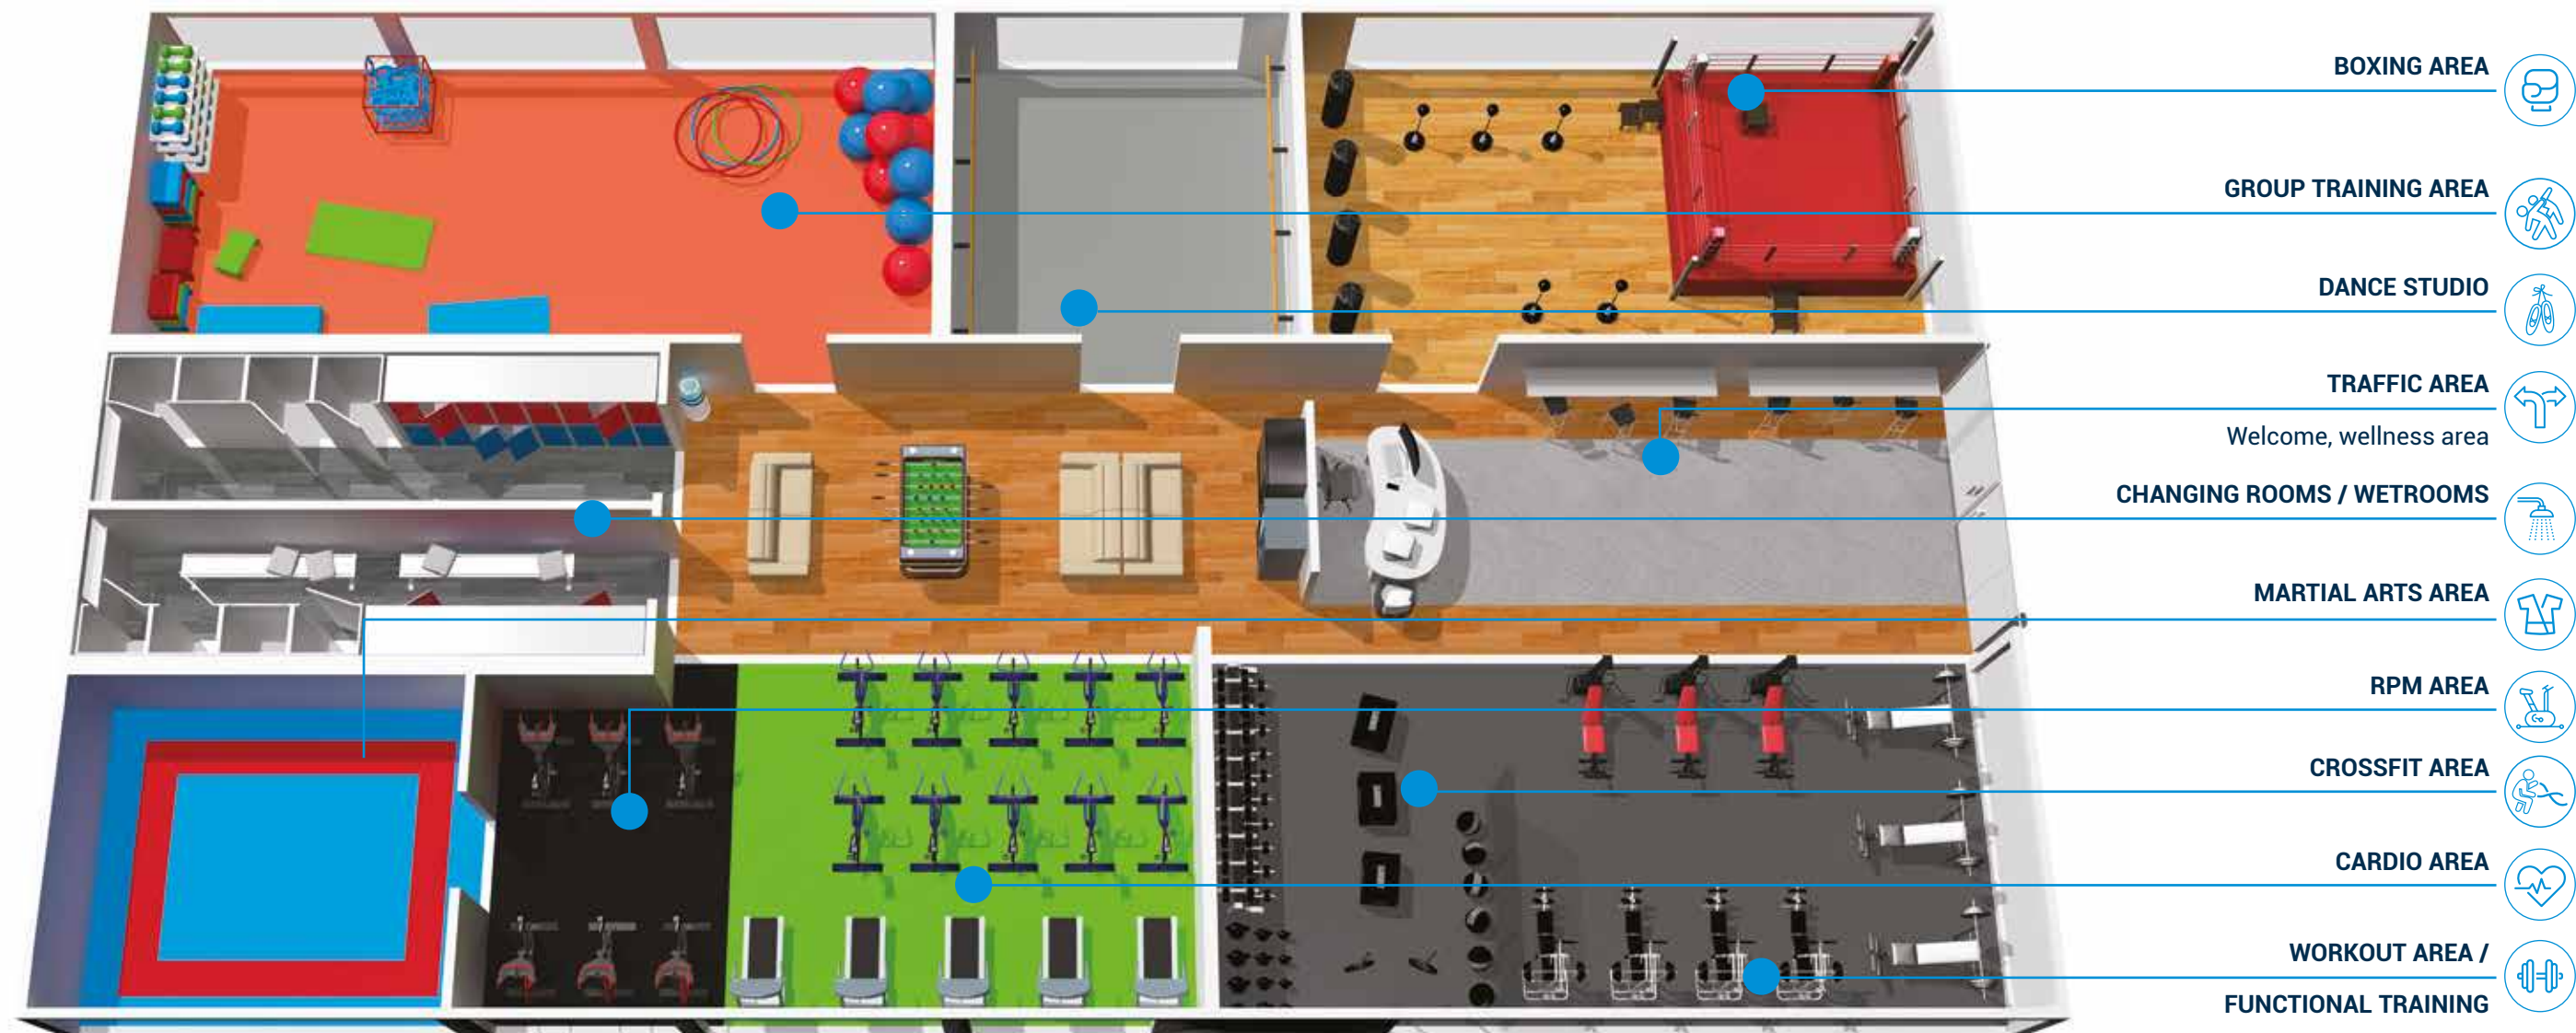

CONVERT YOUR SPORTS FACILITY INTO TEMPORARY SOCIAL EVENT HALL
WITH OUR PROTECTION SOLUTIONS:



PROTECTILES
Textile protection tiles
1 box of 5 pcs - 10m²
total weight: 3.1kg/m²
total thickness: 5.2 mm
1 m x 2 m



TROLLEY FOR PROTECTILES
Ideal flooring
for traffic areas
Capacity: 100 Protectiles





TOUCHDOWN
PVC floor protection
total weight: 2.2kg/m²
total thickness: 1.45mm
2m x 27lm



UNROLLER FOR TOUCHDOWN
2 elements kit
(A) device
(B) chuck

Some of our references...

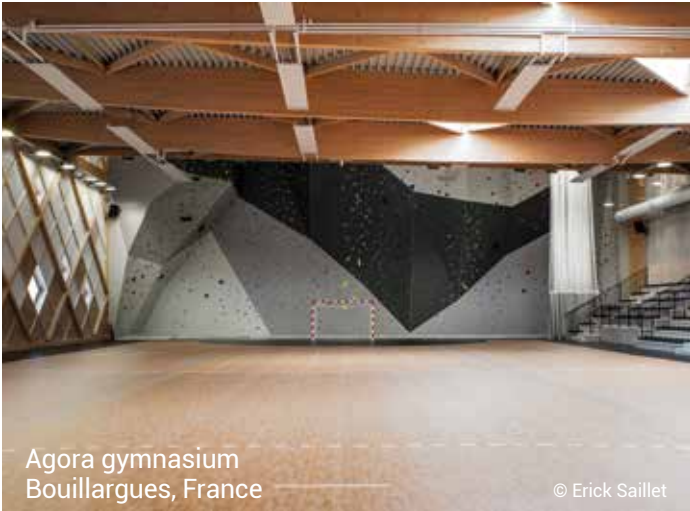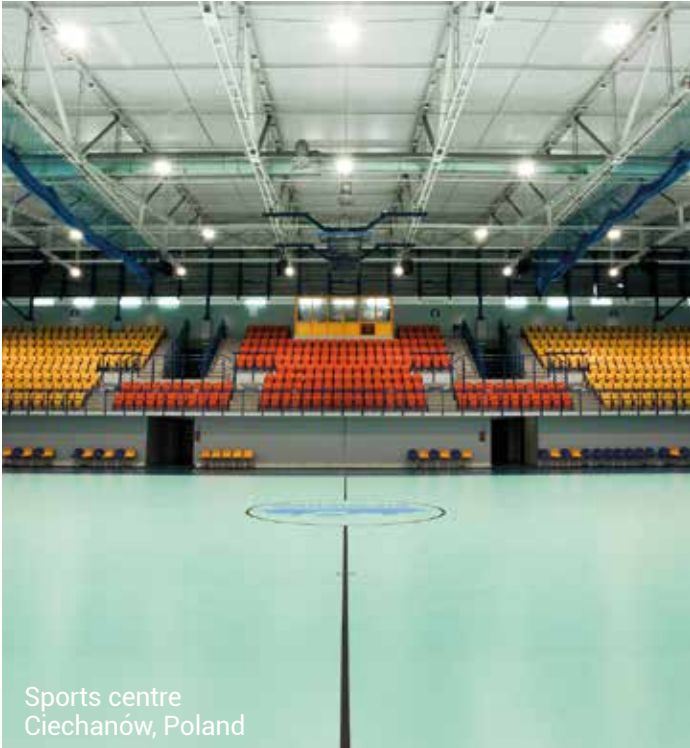

DESIGN	COLOUR	OMNISPORTS PRODUCT CODES						WELDING RODS		
		COMPACT	SPEED	TRAINING	REFERENCE MULTI-USE	ACTIVE+	PUREPLAY	5 MM	NCS	LRV
SOLID	TONIC BLUE	3917069	3707069	3708069	26528069	26541069		1285848	S6030-R90B	7
SOLID	NIGHT BLUE	3917024			26528024	26541024		1285029	S4050-R90B	12
SOLID	SKY BLUE	3917017	3707004	3708017	26528017	26541017	26513017	1285172	S4040-R90B	19
SOLID	TEAL	3917015	3707015	3708015	26528015	26541015		1285015	S3050-B40G	19
SOLID	LAGOON	3917034			26528034	26541034		1285195	S2030-B40G	43
SOLID	CORAL	3917033			26528033	26541033	26513033	1285633	S2070-Y80R	19
SOLID	CRANBERRY PINK	3917062			26528062	26541062		1285852	S2060-R10B	20
SOLID	KAKI	3917065			26528065	26541065		1285849	S5005-G50Y	24
SOLID	TONIC RED	3917072	3707072	3708072	26528072	26541072		1285854	S1580-Y90R	13
SOLID	GREY	3917009	3707009	3708009	26528009	26541009	26513009	1285183	S5500-N	21
SOLID	SILVER GREY	3917068	3707068	3708068	26528068	26541068		1285851	S3502-B	38
SOLID	BLACK	3917010	3707010	3708010	26528010	26541010		1285206	S9000-N	5
SOLID	TONIC ORANGE	3917071	3707071	3708071	26528071	26541071		1285853	S2070-Y50R	25
SOLID	TONIC YELLOW	3917073	3707073	3708073	26528073	26541073		1285013	S2050-Y	48
SOLID	TONIC GREEN	3917070	3707070	3708070	26528070	26541070		1285847	S5040-G	13
CONCRETE	DEEP BLUE	3921063			26547063	26546063		1285850	S7005-B20G	11
CONCRETE	COOL GREY	3921061	3711061	3712061	26547061	26546061		1285856	S3502-Y80R	35
CONCRETE	GREY BEIGE	3921064			26547064	26546064		1285857	S4010-Y10R	32
WOOD	LIGHT MAPLE	3916019			26528019	26542019	26505019	1285031	S2010-Y20R	47
WOOD	NATURAL OAK	3916066			26528066	26542066		1285855	S3010-Y20R	42
WOOD	GOLDEN MAPLE	3916002	3911002	3709002	26528002	26542002	26505002	1285368	S3030-Y20R	36
WOOD	CLASSIC OAK	3916003	3911003	3709003	26528003	26542003		1285016	S4030-Y20R	24
WOOD	NORDIC OAK	3916067	3911067	3709067	26528067	26542067		1285846	S3005-Y50R	45
WOOD	BLACK MAPLE	3916060			26528060	26542060		1285206	S8500-N	5
WOOD	GREY MAPLE	3916005			26528005	26542005	26505009	1285183	S5502-Y80R	19

DANCEFLOOR

SILVER GREY: 206059003 - BLACK: 206059101

SPEED TABLE TENNIS

TONIC RED: 3910005

ACCESSORIES & PROTECTION PRODUCT CODES:

GREENLAY™ GLUE
210998002

GREENLAY™
TARKOTAPE
1551185

TARKOLAY
UNDERLAYER
3960005

ALUMINIUM RAMP
210997 001

VENTILATED SKIRTING
FOR GREENLAY™ & TARKOLAY
INSTALLATION
Oak varnished: 1551067
Beech varnished: 1551065

PROTECTILES
Anthracite: 44003000
Light grey: 44003001
Dark brown: 44003002
Night blue: 44003003
Red: 44003004

TROLLEY FOR
PROTECTILES
1568001

TOUCHDOWN
Chalk: 3964005
Concrete dark grey: 3964006
Concrete cool grey: 3964007

UNROLLER FOR
TOUCHDOWN
(A) device : 1562001
(B) chuck : 1562002

TECHNICAL DATA	STANDARD	COMPACT	SPEED	TRAINING	REFERENCE MULTI-USE	ACTIVE +	PUREPLAY
CERTIFICATION & CLASSIFICATION							
Type of floor covering	EN 14041	Heterogeneous compact indoor floorcoverings	Heterogeneous indoor floorcoverings	Heterogeneous indoor floorcoverings			
	EN 14904				Heterogeneous indoor sports floorcoverings	Heterogeneous indoor sports floorcoverings	Heterogeneous indoor sports floorcoverings
Declaration of Performance	EN 14041	0120-003-DoP-2013-04	0120-006-DoP-2013-04	0120-026-DoP-2013-04			
	EN 14904				0120-080-DoP-2020-06	0120-095-DoP-2020-09	0120-071-DoP-2016-07
TECHNICAL CHARACTERISTICS							
Total thickness	ISO 24346 (EN 428)	2.0 mm	3.45 mm	5.0 mm	6.2 mm	8.1 mm	9.4 mm
Total weight	ISO 23997 (EN 430)	3 045 g/m²	3 040 g/m²	3 600 g/m²	3 950 g/m²	4 760 g/m²	5 200 g/m²
Width	ISO 24341 (EN 426)	2 m	2 m	2 m	2 m	2 m	2 m
Length	ISO 24341 (EN 426)	23 lm	20.5 lm	20.5 lm	20.5 lm	20.5 lm	20.5 lm
REQUIREMENTS FOR USE							
Shock absorption ***	Average measured value		≥ 4%	≥ 17%	P1	P2	P2
	EN 14808 requirement				≥ 25%	≥ 35%	≥ 35%
Friction ➡	Average measured value	Compliant	Compliant	Compliant	Compliant	Compliant	Compliant
	EN 13036-4 requirement	80 to 110	80 to 110	80 to 110	80 to 110	80 to 110	80 to 110
Vertical deformation ⬆	Average measured value		≤ 0.8 mm	≤ 1 mm	P1	P2	P2
	EN 14809 requirement		≤ 5 mm	≤ 5 mm	≤ 2 mm	≤ 3 mm	≤ 3 mm
TECHNICAL REQUIREMENTS							
Vertical ball behaviour 🏐	Average measured value		Compliant	Compliant	Compliant	Compliant	Compliant
	EN 12235 requirement		≥ 90%	≥ 90%	≥ 90%	≥ 90%	≥ 90%
Reaction to fire	EN 13501-1	Bfl s1*	Cfl s1*	Cfl s1*	Cfl s1+/**	Cfl s1+/**	Cfl s1+/**
Resistance to wear 🕒	EN ISO 5470-1		≤ 1g	≤ 1g	≤ 1g	≤ 1g	≤ 1g
Resistance to indentation ⬇	Average measured value***		≤ 0.18 mm	≤ 0.16 mm	≤ 0.1 mm	≤ 0.3 mm	≤ 0.5mm
	EN 1516 requirement		≤ 0.5 mm	≤ 0.5 mm	≤ 0.5 mm	≤ 0.5 mm	≤ 0.5 mm
Resistance to a rolling load 🌀	Measured value			Compliant	Compliant	Compliant	Compliant
	EN 1569 requirement			≤ 0.5 mm	≤ 0.5 mm	≤ 0.5 mm	≤ 0.5 mm
Reduction of impact noise	EN ISO 717-2		20dB	20dB	21dB	21dB	21dB
Thermal resistance	EN ISO 10456	Approx. 0.02 m² K/W	Approx. 0.05 m² K/W	Approx. 0.07 m² K/W	Approx. 0.09 m² K/W	Approx. 0.12 m² K/W	Approx. 0.14 m² K/W
ENVIRONMENTAL PERFORMANCES							
Total VOC emissions	ISO 16000-9	≤ 10 µg/m³ (after 28 days)	≤ 10 µg/m³ (after 28 days)	≤ 10 µg/m³ (after 28 days)	≤ 10 µg/m³ (after 28 days)	≤ 10 µg/m³ (after 28 days)	≤ 10 µg/m³ (after 28 days)
Recycled content		32%	25%	22%	21%	23%	21%
COLOURS							
		Solid: 15 Concrete: 3 Wood: 7	Solid: 15 Concrete: 3 Wood: 7	Solid: 15 Concrete: 3 Wood: 7	Solid: 15 Concrete: 3 Wood: 7	Solid: 15 Concrete: 3 Wood: 7	Solid: 3 Wood: 3

The above information is subject to modification for the benefit of further improvement. (12/2024). * Glued installation ** GreenLay™ installation *** Measured on glued or with GreenLay™ Tarkett Sports' instructions regarding installation, cleaning and maintenance should be observed. Please contact Tarkett at the address shown for these instructions.





A WORLD LEADER IN ATHLETIC SURFACES



OMNISPORTS EN 01/2025 - 2060030090

■ **WESTERN EUROPE:** Austria: Tarkett Holding GmbH, Niederlassung Wien – Tel. +43 1 47 88 062 ■ Belgium: Tarkett Sports – Tel. +32 52 26 24 29 ■ Denmark: Tarkett A/S – Tel. +45 43 90 60 11 ■ Finland: Tarkett Oy – Tel. +358 9 4257 9000 ■ France: Tarkett Sports – Tel. +33 1 41 20 41 34 ■ Germany: Tarkett Holding GmbH – Tel. +49 62 33 810 ■ Greece: Tarkett Monoprosopi Ltd – Tel. +30 210 6745 340 ■ Italy: Tarkett S.p.A. – Tel. +39 0744 7551 ■ Luxembourg: Tarkett Sports – Tel. +352 949211 8230 ■ Netherlands: Tarkett Sports – Tel. +31 416 685 491 ■ Norway: Tarkett AS – Tel. +47 32 20 92 00 ■ Portugal: Tarkett SA – Tel. +351 21 427 64 20 ■ Spain: Fieldturf Poligras Tel: +34 630 93 67 71 ■ Sweden: Tarkett Sverige AB – Tel. +46 771 25 19 00 ■ Switzerland: Tarkett Holding GmbH – Tel. +41 043 233 79 24 ■ Turkey: Tarkett Aspen – Tel. +90 212 213 65 80 ■ United Kingdom: Tarkett Ltd – Tel. +44 (0) 1622 854 040 ■ **EASTERN EUROPE:** Baltic Countries: Tarkett Baltics: Tel. +370 37 262 220 ■ Czech Republic: Tarkett org. složka – Tel. +420 271 001 600 ■ Hungary: Tarkett Polska SP Z.O.O. magyarországi fióktelepe – Tel. +36 1 437 8150 ■ Poland: Tarkett Polska Sp. z o.o. – Tel. +48 22 16 09 231 ■ Russian Federation: ZAO Tarkett RUS – Tel. +7 495 775 3737 ■ Slovakia: Tarkett Polska, organizačná zložka – Tel. +421 2 48291 317 ■ South East Europe: Tarkett SEE – Tel. +381 21 7557 649 (44) 569 12 21 ■ Ukraine: Tarkett UA – Tel. +38 (0) 44 569 12 21 ■ **ASIA AND OCEANIA:** Australia: Tarkett Australia Pty Ltd – Tel. +61 2 88 53 12 00 ■ China: Tarkett Floor Covering (Shanghai) Co. Ltd. – Tel. +86 (21) 60 95 68 38 ext 841 ■ North East Asia: Tarkett Hong Kong Limited – Tel. +852 2511 8716 ■ India: Tarkett Flooring India Pvt. Ltd. – Bangalore – Tel. +91 80 4130 3793 – New Delhi – Tel. +91 11 4352 4073 – Mumbai – Tel. +91 22 2648 8750 ■ South East Asia: Tarkett Flooring Singapore Pte. Ltd. – Tel. +65 6346 1585 ■ **AFRICA:** Tarkett International: Tel. +33 1 41 20 41 01 ■ **MIDDLE EAST:** Tarkett Middle East: Tel. +961 1 51 3363/4 ■ Israel: Tarkett International: Tel. +33 1 41 20 41 01 ■ **NORTH AMERICA:** USA: Tarkett Inc. – Tel. +1 713 869 5811 / Johnsonite – Tel. +1 440 543 8916 ■ Canada: Tarkett Inc. – Tel. +1 450 293 173 ■ **LATIN AMERICA:** Brazil: Tarkett – Tel. 55 12 3954 7108 ■ Argentina - Chile - Uruguay: Tarkett Latam Mercosur – Tel. +54 11 47 08 07 72 / +54 9 11 44 46 88 82 ■ Bolivia - Colombia - Ecuador - Panama - Paraguay - Peru - Trinidad and Tobago - Venezuela: Tarkett – Tel. +55 11 9 8410 9310 / +55 11 95494 0069 ■ Mexico /Central America: Tarkett Latam Mexico – Tel. +55 11 98410 9310.



Somplan 700

HOMOGENEOUS COMPACT VINYL FLOORCOVERING

Homogeneous
compact vinyl
solution for
heavy-traffic
areas

University Hospital	
FLOOR 3	Maternity Ward
FLOOR 2	Pathology Oncology Pharmacy
FLOOR 1	Surgical Day Unit X-Ray

Contact: +91 94007 14000

Somplan 700



306005 001 ☐



306005 004 ☐



306005 005 ☐



306005 008 ☐




306005 009 ☐



306005 010 ☐



306005 014 ☐

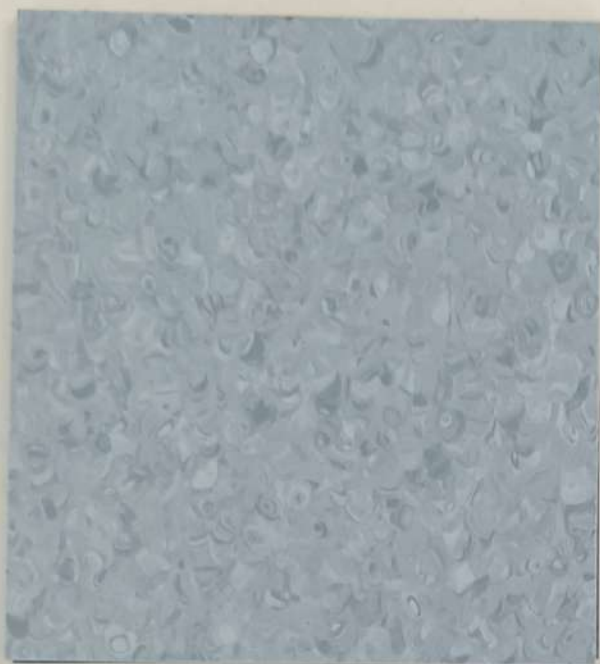

306005 024 ☐



306005 027 ☐



306005 028 ☐



306005 019 ☐



306005 020 ☐



306005 029 ☐

Key features:

- High resistance to wear, compression, stain and bacteria
- Phthalate-free plasticizers for people's health and safety
- Extremely low TVOC emission ensuring high indoor air quality
- Professional PUR surface treatment for easy maintenance
- Non-directional natural pattern available in 13 colours



Somplan 700

TECHNICAL DATA

STANDARD

SOMPLAN 700

CLASSIFICATION

Homogeneous Compact Vinyl Floorcovering

ISO 10581

Classification

ISO 10874

Classes:

Commercial

34

Industrial

43

TECHNICAL CHARACTERISTICS

Total thickness

ISO 24346

2.0mm

Dimension - Length

ISO 24341

231m

Dimension - Width

ISO 24341

2m

Total weight

ISO 23997

2650g/m²

Surface treatment

PUR

TECHNICAL PERFORMANCES

Binder content

ISO 10581

Type I

Abrasion group

EN 660-2

Group T

Dimensional stability

ISO 23999

≤ 0.40% (Rolls)

Curl resistance to heat

ISO 23999

≤ 4.00mm

Reaction to fire

EN 13501-1

B_{fl}-s1

Residual indentation

ISO 24343-1 measured value

0.04mm

ISO 10581 requirement

≤ 0.10mm

Castor chair test

ISO 4918 - EN 425

No damage

Thermal resistance

EN ISO 10456

0.04 (m²·K)/W

Light fastness

ISO 105 B02

≥ 6

Chemical resistance

ISO 26987

Good resistance

Slip resistance

DIN 51130

R9

EN 13893

μ_z ≥ 0.3

Static electrical charge

EN 1815

≤ 2kV

Bacteria resistance

ISO 846-C

Doesn't favour growth

Clean room test

ISO 14644-1

ISO class 2

Flexibility

ISO 24344

20mm

ENVIRONMENT

TVOC 28 days AgBB test

ISO 16000

< 10ug/m³

Recyclable

100%

Plasticizer

Phthalate-free technology

The above information is subject to modification for the benefit of further improvement.

Tarkett's instructions regarding installation, cleaning and maintenance should be observed. Please contact Tarkett at the address shown for these instructions.



Email: enquiry@sntproducts.in

PUNE | MUMBAI | BANGALORE | CHENNAI | DELHI

Contact: +91 94007 14000



iD Elegance Compact 55

LUXURY VINYL TILES

A great variety
of elegant
designs for
commercial
areas

Contact: +91 94007 14000

The Range

Soft Oak White

22.9 x 121.9 cm



256069030 ☐

Soft Oak Light Brown



256069027 ☐

Walnut Light Brown



256069036 ☐

Soft Oak Beige



256069025 ☐

Soft Oak Natural

22.9 x 121.9 cm



256069029 ☐


Cement

91.4 x 91.4 cm



256067010 ☐

Terazzo

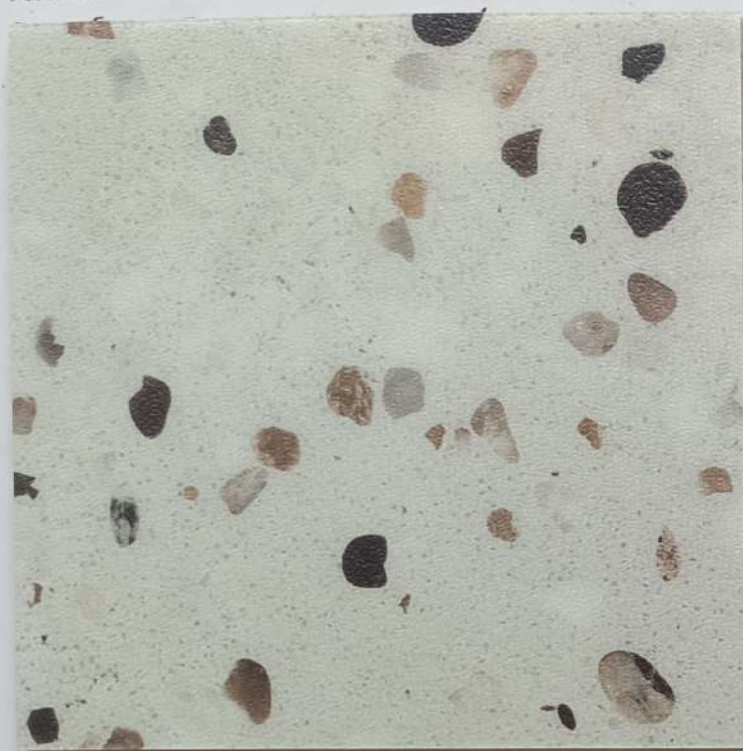

256067015 ☐



GREAT RESISTANCE AND EASY CLEANING

- 0,55 mm Wear Layer suitable for high traffic commercial areas
- Hygienic surface treated with the Tarkett unique TopClean XP coating that strengthens it, extends the life-cycle and simplifies cleaning and maintenance.
- 100% matte finish



GREAT VARIETY OF DESIGNS AND FORMAT

- 11 colours options in 2 formats that you can combine
- Infinite installation possibilities: ashlar, herringbone, monolithic...
- Realistic embossing that recreates the look and feel of wood, stone and cement

Venezia



256067002 ☐



A SUSTAINABLE SOLUTION



- Total VOC emissions are at least 10 times lower than Europe's strictest standards.
- Floorscore certified
- Enable to win credits in LEED & WELL green buildings
- Uses a phthalate-free technology, based on alternative plasticizers that can be used for sensitive applications such as the production of toys, food packaging and medical devices.
- 100% recyclable.

iD Elegance Compact 55

TECHNICAL DATA

Classification	Standards	iD Elegance Compact 55
Classification	EN ISO 10582:2010	Heterogeneous PVC Compact floor covering
	EN ISO 10874	Domestic: 23 Commercial: 33 Industrial: 42
Wear Layer binder content	EN ISO 10582	Type I
Technical performance		
Total thickness	EN ISO 24346	2,3 mm
Wear layer thickness	EN ISO 24340	0.55 mm
Total weight	EN ISO 23997	3857 g/m ²
Bevelled edges		No
Surface treatment (PUR)		Yes – TopClean XP
Form of delivery	EN ISO 24342	
	Planks	22.86 x 121.92 cm 12 planks / box (3.36m ²), 80 boxes/pallet (268.80 m ²)
	Tiles	91.44 x 91.44 cm 4 tiles / box (3.34m ²), 50 boxes/pallet (167 m ²)
Technical performance		
Dimensional stability(%)	EN ISO 23999	≤ 0.25 %
Curl resultant to heat 6h at 80 (mm)	EN ISO 23999	≤ 2.00 mm
Reaction to fire	EN 13501-1	Bfl-s1 glued over A2fl or A1fl substrate (concrete)
Residual Indentation	EN ISO 24343-1 (EN 433)	Required value: ≤ 0.10 mm Average measured value: 0.03 mm
Furniture leg	EN 424	No damage
Castor chair	ISO 4918 (EN 425)	No damage
Thermal resistance	EN ISO 10456	0.03 m ² . K/W
Underfloor heating	EN ISO 10456	Suitable – max. 27°C
Impact sound reduction	EN ISO 140-8 EN ISO 717/2	ΔLw = 2 dB
Light fastness	EN ISO 105-B02	≥ 6
Resistance to chemicals	EN ISO 26987 (EN 423)	Good resistance
Slip resistance	DIN 51130 EN 13893	R9
Electrical properties	EN 1815 EN 1081	< 2 kV on concrete R1 > 1010 Ω
Colours		Wood: 8 - Ceramic: 3

The above information is subject to modification for the benefit of further improvement. For the latest information, please visit our website: www.tarkett-asia.com
Tarkett's instructions regarding installation, cleaning and maintenance should be observed.



Contact: +91 94007 14000

Please get in touch with us at enquiry@sntproducts.in



iD Spesso 55 / 70 Square Set 55 / 70


Luxury Vinyl Tiles

Stimulate
ambiances
with resistant
and large
vinyl tiles

Contact : +91 94007 14000



 **Tarkett**

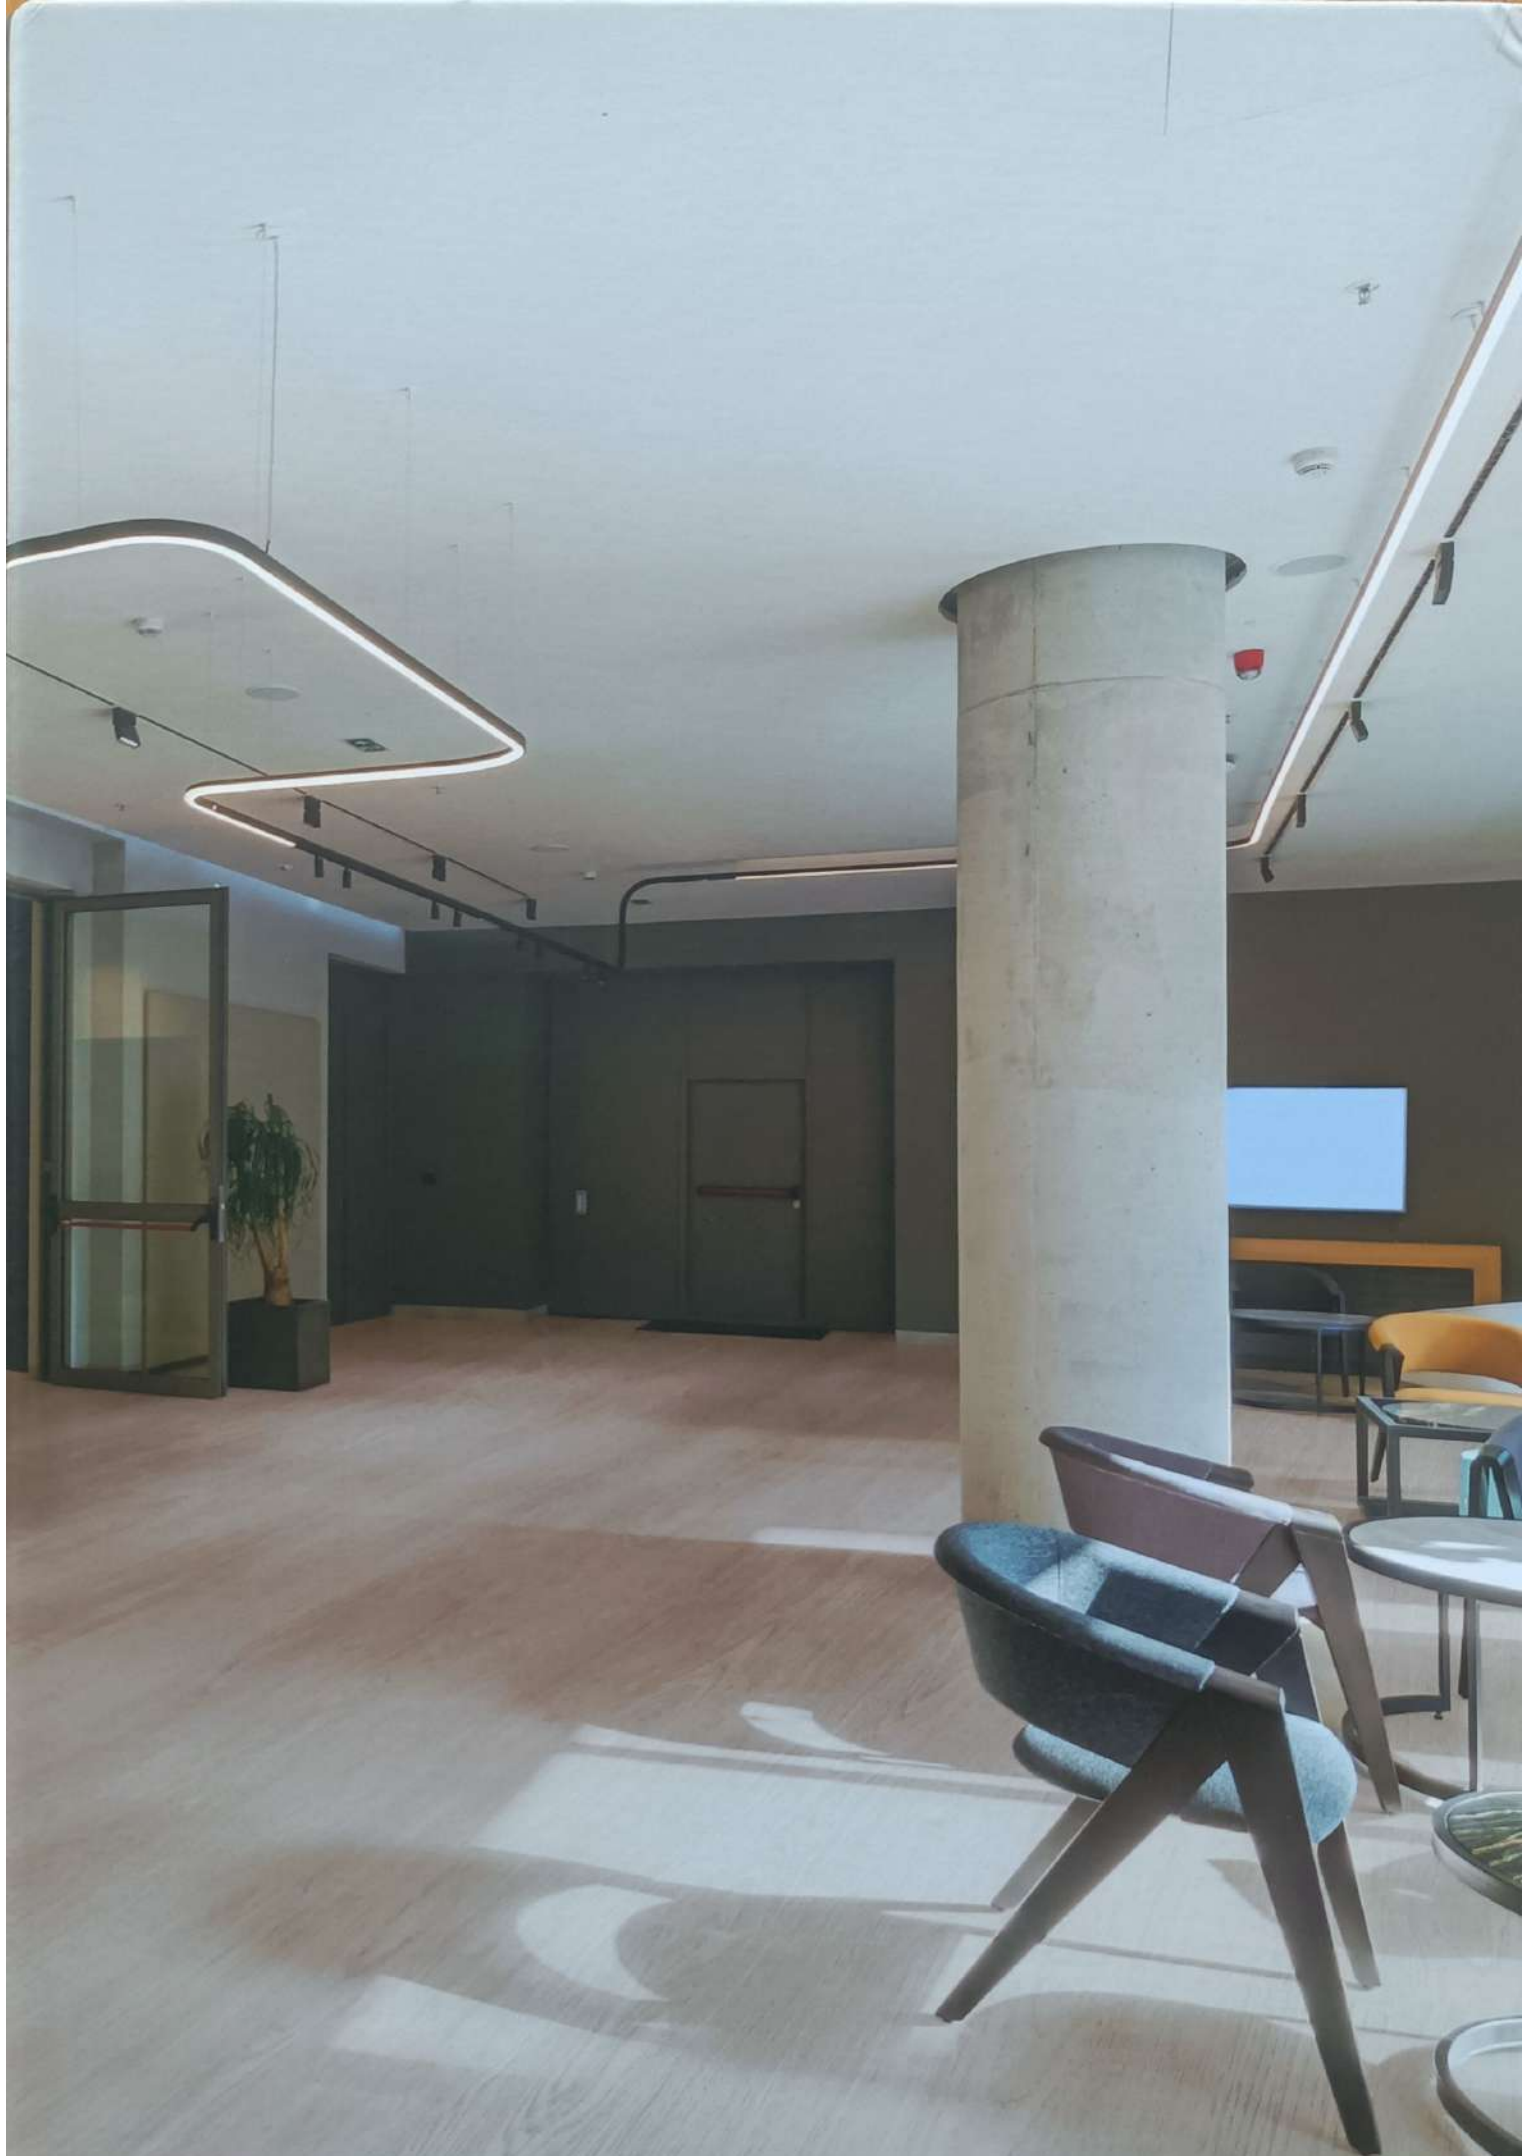

Square Set 55 Classy Oak BEIGE 002 Plank 1219.2 x 228.6 mm

iD Spesso 55 / 70

Square Set 55 / 70

Soft Oak



008 1219.2 x 228.6 mm

Soft Oak



Brown

010 1219.2 x 228.6 mm

Primary Pine



Natural

011 1219.2 x 228.6 mm

Soft Oak



Natural

009 1219.2 x 228.6 mm

Soft Oak



Beige

006 1219.2 x 228.6 mm

Soft Oak



Light Beige

007 1219.2 x 228.6 mm

iD Spesso 55 - 1219.2 x 228.6 mm - 256073 / iD Spesso 70 - 1219.2 x 228.6 mm - 256079
iD Spesso 55 - 914.4 x 914.4 mm - 256072 / iD Spesso 70 - 914.4 x 914.4 mm - 256078

Square Set 55 - 1219.2 x 228.6 mm - 256075 / Square Set 70 - 1219.2 x 228.6 mm - 256081
Square Set 55 - 914.4 x 914.4 mm - 256074 / Square Set 70 - 914.4 x 914.4 mm - 256080

Classy Oak



001 1219.2 x 228.6 mm

Classy Oak



002 1219.2 x 228.6 mm

Classy Oak



003 1219.2 x 228.6 mm

Classy Oak



004 1219.2 x 228.6 mm

Classy Oak



005 1219.2 x 228.6 mm



iD Spesso Backing



Square Set Backing

Light Beige


iD Spesso 55 - 1219.2 x 228.6 mm - 256073 / iD Spesso 70 - 1219.2 x 228.6 mm - 256079
iD Spesso 55 - 914.4 x 914.4 mm - 256072 / iD Spesso 70 - 914.4 x 914.4 mm - 256078

Square Set 55 - 1219.2 x 228.6 mm - 256075 / Square Set 70 - 1219.2 x 228.6 mm - 256081
Square Set 55 - 914.4 x 914.4 mm - 256074 / Square Set 70 - 914.4 x 914.4 mm - 256080



iD Spesso 55 - 1219.2 x 228.6 mm - 256073 / iD Spesso 70 - 1219.2 x 228.6 mm - 256079
iD Spesso 55 - 914.4 x 914.4 mm - 256072 / iD Spesso 70 - 914.4 x 914.4 mm - 256078

Square Set 55 - 1219.2 x 228.6 mm - 256075 / Square Set 70 - 1219.2 x 228.6 mm - 256081
Square Set 55 - 914.4 x 914.4 mm - 256074 / Square Set 70 - 914.4 x 914.4 mm - 256080

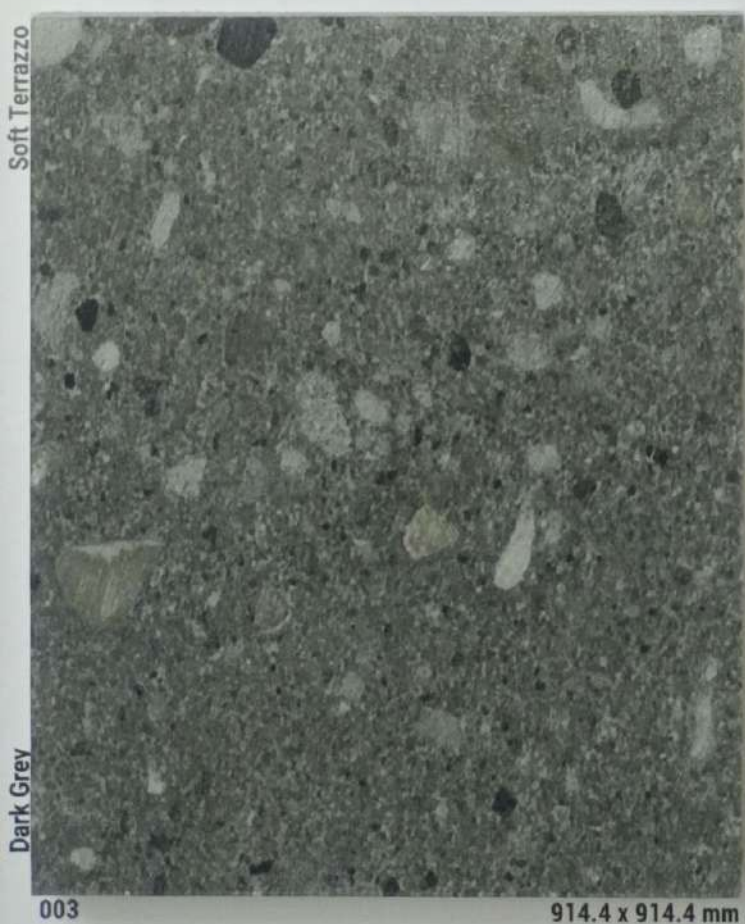




iD Spesso 55 / 70 Square Set 55 / 70

TECHNICAL DATA	STANDARDS	iD Spesso 55	iD Spesso 70	Square Set 55	Square Set 70
CLASSIFICATION					
Classification	EN ISO 10582	Heterogeneous PVC floor covering			
	EN ISO 10874	Domestic : 23 Commerical : 33	Domestic : 23 Commerical : 34	Domestic : 23 Commerical : 33	Domestic : 23 Commerical : 34
Wear Layer binder content	EN ISO 10582	Type I			
TECHNICAL CHARACTERISTICS					
Total thickness	EN ISO 24346	5.00 mm	5.00 mm	4.00 mm	4.00 mm
Wear layer thickness	EN ISO 24340	0.55 mm	0.70 mm	0.55 mm	0.70 mm
Total Weight	EN ISO 23997	9000 g/m²	9100 g/m²	7600 g/m²	7700 g/m²
Bevelled edges	-	Microbevels			
Surface treatment	-	Yes – TopClean XP			
Form of delivery	EN ISO 24342 Plank (1219.2 x 228.6 mm)	5 planks / box (1.39m²) 72 boxes/pallet (100.33 m²)		6 planks / box (1.67m²) 78 boxes/pallet (130.42 m²)	
	Tile (914.4 x 914.4 mm)	3 tiles / box (2.51m²) 46 boxes/pallet (115.38 m²)		3 tiles / box (2.51m²) 46 boxes/pallet (115.38 m²)	
TECHNICAL PERFORMANCE					
Dimensional stability	EN ISO 23999	≤ 0.25 %			
Curl resultant to heat 6h at 80°C (mm)	EN ISO 23999	≤ 2.00 mm			
Reaction to fire	EN 13501-1	Bfl-s1			
Residual Indentation	EN ISO 24343-1	≤ 0.10 mm		≤ 0.20 mm	
Castor chair	ISO 4918 (EN 425)	No damage			
Furniture leg	EN 424	No damage			
Light fastness	EN ISO 105-B02	≥ 6			
Resistance to chemicals	EN ISO 26987 (EN 423)	Good resistance			
Slip resistance	DIN 51130 EN 13893	R9 μ ≥ 0.30			
Underfloor heating	-	Suitable – max. 27°C			
VOC emission	ISO 16000-9	≤ 100 µg/m³ (after 28 days)			
Recyclable	-	100%			
Plasticizer	-	Phthalate-free			
Commercial warranty	-	10 years			
Colours	-	Wood: 11 Stones / Ceramic: 9			

The above information is subject to modification for the benefit of further improvement (01/2024).

For the latest information, please visit our website: www.tarkett-asia.com

Tarkett's instructions regarding installation, cleaning and maintenance should be observed.



enquiry@sntproducts.in

www.sntproducts.in

Pune | Mumbai | Bengaluru | Delhi



www.tarkett-asia.com
Contact: saleshk@tarkett.com



Contact: +91 94007 14000




FLOORING | CEILING | FURNITURE | FINISHES

Val de Reuil sports centre, France © Stefano Candito

OMNISPORTS VINYL

To meet all your needs

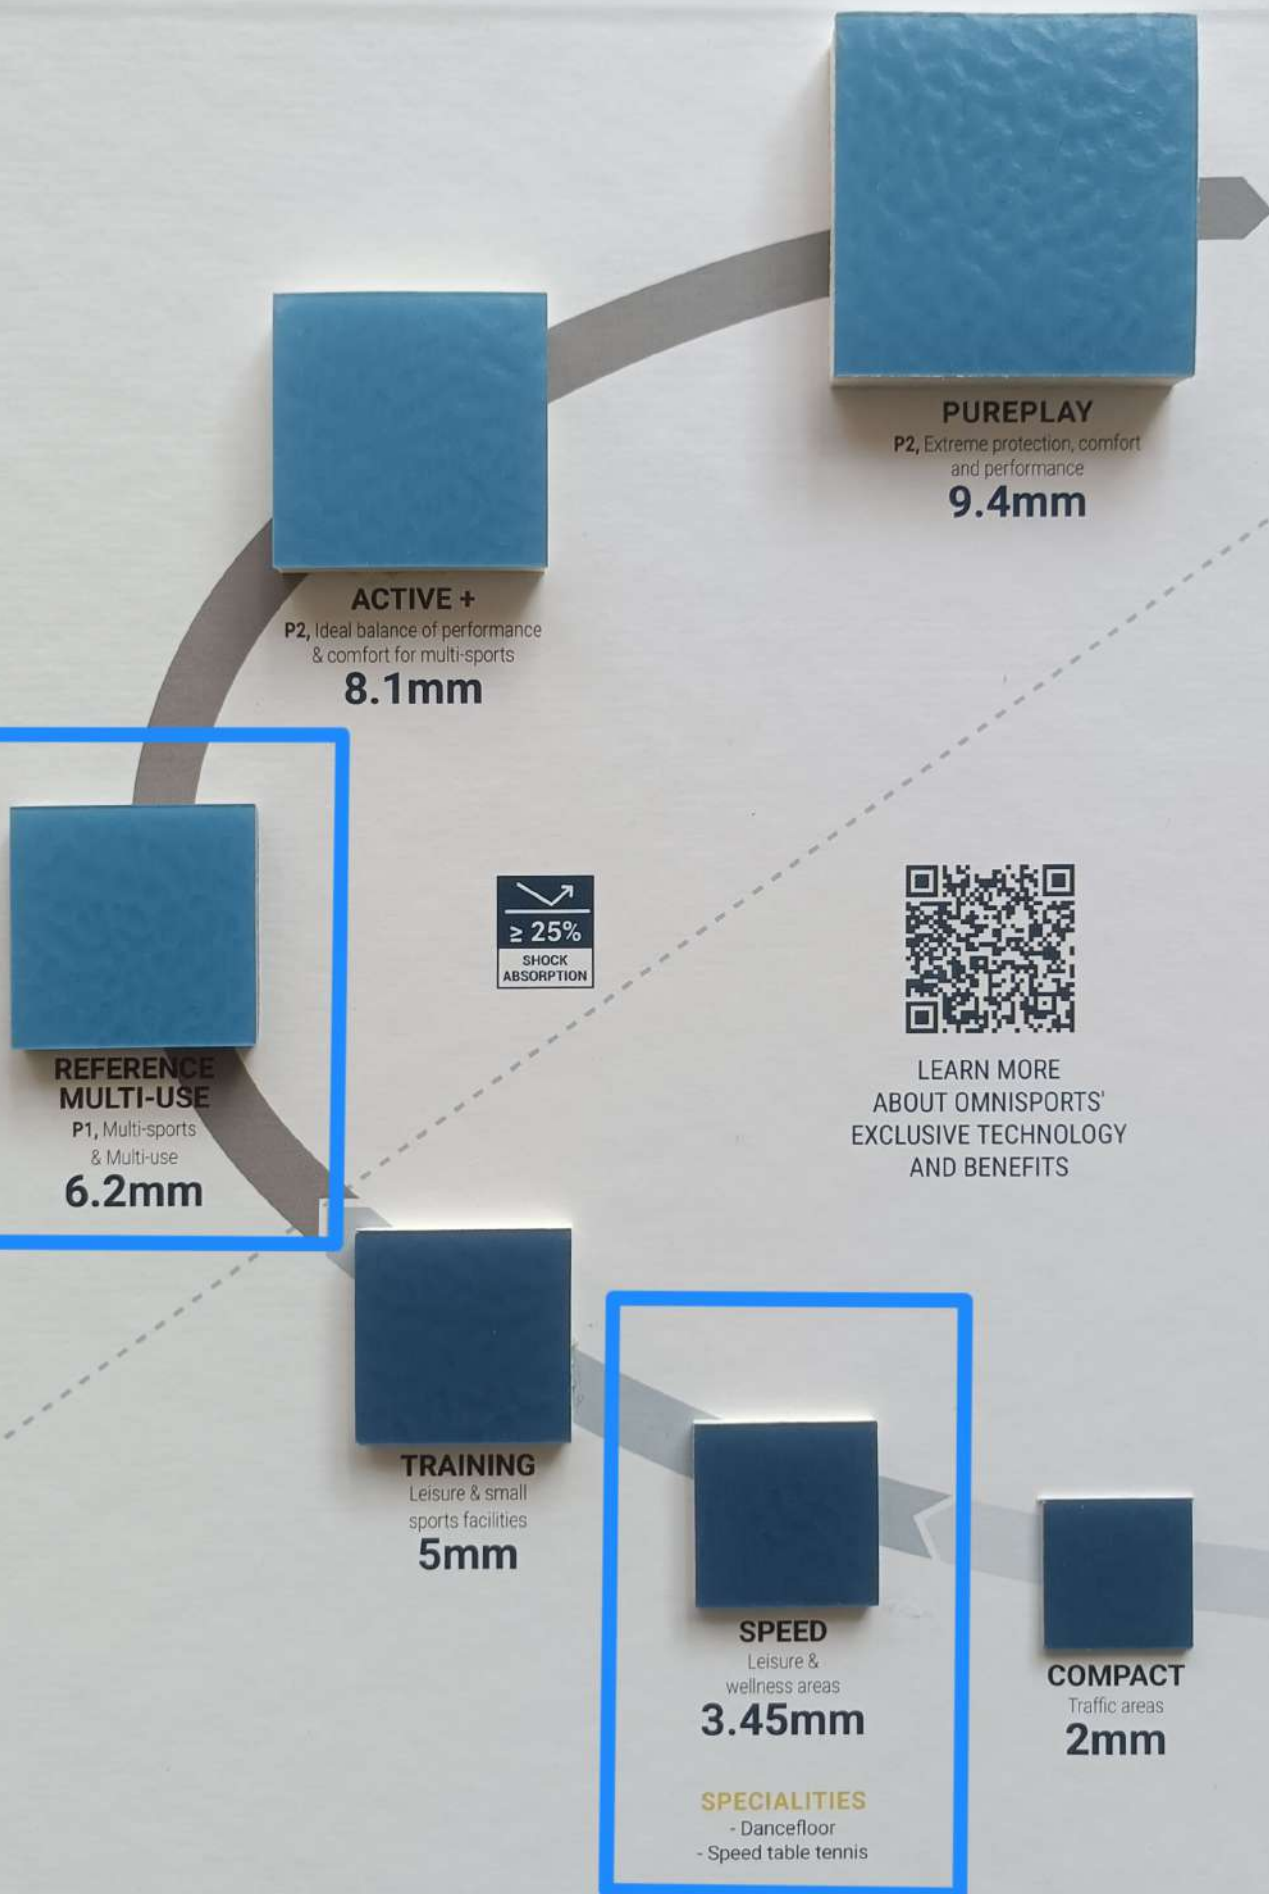

To comply with the EN standard, Omnisports Compact must be combined with Lumaflex Energy or Evolution sub-constructions. Please refer to Lumaflex documentation.

OMNISPORTS

Solid designs

OMNISPORTS SOLID DESIGNS

Clear Blue



3917 017 26528 017
3707 004 26541 017
3708 017 26513 017

Night Blue



3917 024* 26528 024
3707 024* 26541 024
3708 024*

Royal Blue



3917 016 26528 016
3707 016 26541 016
3708 016

Teal



3917 015 26528 015
3707 015 26541 015
3708 015

Lagoon



3917 034* 26528 034
3707 034* 26541 034
3708 034*

Mint Green



3917 026 26528 026
3707 002 26541 026
3708 026

Light Green



3917 020* 26528 020
3707 020* 26541 020
3708 020*

Lime



3917 035* 26528 035
3707 035* 26541 035
3708 035*

Grey



3917 009 26528 009
3707 009 26541 009
3708 009 26513 009

Black



3917 010 26528 010
3707 010 26541 010
3708 010

COMPACT - 2mm
SPEED - 3.45mm
TRAINING - 5mm

REFERENCE MULTI-USE - 6.2mm
ACTIVE+ - 8.1mm
PUREPLAY - 9.4 mm

* Omnisports Compact, Speed and Training - Minimum order quantity: 700 m² (+/- 10%)

OMNISPORTS

Solid designs & specialities

OMNISPORTS SOLID DESIGNS



3917 013 26528 013
3707 013 26541 013
3708 013



Orange

3917 012 26528 012
3707 012 26541 012
3708 012



Red

3917 011 26528 011
3707 003 26541 011
3708 011



3917 033* 26528 033
3707 033* 26541 033
3708 033* 26513 033



Pink

3917 022* 26528 022
3707 022* 26541 022
3708 022*



Purple

3917 025* 26528 025
3707 025* 26541 025
3708 025*

OMNISPORTS SPECIALITIES

DANCEFLOOR



Medium Grey

3685 002



Black

3685 001

TABLE TENNIS



Red

3910 002

COMPACT - 2mm
SPEED - 3.45mm
TRAINING - 5mm

REFERENCE MULTI-USE - 6.2mm
ACTIVE+ - 8.1mm
PUREPLAY - 9.4 mm

* Omnissports Compact, Speed and Training - Minimum order quantity: 700 m² (+/- 10%)

OMNISPORTS

Wood designs

OMNISPORTS WOOD DESIGNS

Light Maple



3916 019* 26528 019
3911 019* 26542 019
3709 019* 26505 019

Beech



3916 001 26528 001
3911 001 26542 001
3709 001

Golden Maple



3916 002 26528 002
3911 002 26542 002
3709 002 26505 002

Classic Oak



3916 003 26528 003
3911 003 26542 003
3709 003

Dark Beech



3916 020* 26528 007
3911 020* 26542 020
3709 020*

Maple Red



3916 006* 26528 006
3911 006* 26542 006
3709 006*

Maple Grey



3916 005 26528 005
3911 005* 26542 005
3709 005* 26505 009

Maple Sky Blue



3916 017 26528 017
3911 017* 26542 017
3709 017*

COMPACT - 2mm
SPEED - 3.45mm
TRAINING - 5mm

REFERENCE MULTI-USE - 6.2mm
ACTIVE+ - 8.1mm
PUREPLAY - 9.4 mm

* Omnisports Compact, Speed and Training - Minimum order quantity: 700 m² (+/- 10%)





HEALTHIER & SAFER ENVIRONMENT

Play in a healthier environment

- Contribute to friendly sports spaces.
- Allergy UK seal of approval.
- Contribute to lung protection thanks to extremely low VOC emissions.

Play safer

- Minimise the risk of injury with integrated cushion backing.
- Provide shock absorption levels for all ages, weights and levels of play.



HIGHER PERFORMANCE & VERSATILITY

Choose the right product for your facility, from practice in schools to competition level.

- Enhance sports performance* thanks to good energy return.
- Guarantee an adequate & consistent level of ball bounce for handball, basketball, volleyball and other sports.
- Accomodate non-sporting events** while providing ideal performance for sports practice.
- Provide a better grip for control when sliding.
- Reduce fatigue throughout sports practice.

*Except for Omnisports Compact

**Omnisports Reference Multi-use



MORE COMFORT & PLEASURE

- Guarantee good underfoot comfort.
- Reduce noise levels thanks to cushion vinyl acoustic.
- Allow for personalised installations with a choice of 24 colours.
- Boost children's energy levels with vibrant colours.



EASY TO MAINTAIN, DURABLE & SUSTAINABLE

High resistance to:

- All type of stains & footwear marks.
- Indentation marks.
- Rolling loads.

Easy and cost effective maintenance:

- With TopClean XP™ engineered surface treatment.

Choose GreenLay™ unique installation method:

- Extremely convenient and sustainable

20%
faster


98%
adhesive free

easy
removal

OMNISPORTS

TECHNICAL DATA	STANDARD	COMPACT	SPEED	TRAINING	REFERENCE MULTI-USE	ACTIVE+	PUREPLAY
CERTIFICATION & CLASSIFICATION							
Type of floor covering	EN 14041	Heterogeneous compact indoor floorcoverings	Heterogeneous indoor floorcoverings	Heterogeneous indoor floorcoverings	-	-	-
	EN 14904	-	-	-	Heterogeneous indoor sports floorcoverings	Heterogeneous indoor sports floorcoverings	Heterogeneous indoor sports floorcoverings
Declaration of Performance	EN 14041	0120-003-DoP-2013-04	0120-006-DoP-2013-04	0120-026-DoP-2013-04	-	-	-
	EN 14904	-	-	-	0120-080-DoP-2020-06	0120-095-DoP-2020-09	0120-071-DoP-2016-04
TECHNICAL CHARACTERISTICS							
Total thickness	ISO 24346 (EN 428)	2 mm	3.45 mm	5 mm	6.2 mm	8.1 mm	9.4 mm
Total weight	ISO 23997 (EN 430)	3045 g/m²	3040 g/m²	3600 g/m²	3950 g/m²	4760 g/m²	5200 g/m²
Width	ISO 24341 (EN 426)	2 m	2 m	2 m	2 m	2 m	2 m
Length	ISO 24341 (EN 426)	23 lm	20.5 lm	20.5 lm	20.5 lm	20.5 lm	20.5 lm
REQUIREMENTS FOR USE							
Shock absorption 	Average measured value	-	≥ 4%	≥ 18%	P1	P2	P2
	EN 14808 requirement	-	-	-	≥ 25%	≥ 35%	≥ 35%
Friction 	Average measured value	Compliant	Compliant	Compliant	Compliant	Compliant	Compliant
	EN 13036-4 requirement	80 to 110	80 to 110	80 to 110	80 to 110	80 to 110	80 to 110
Vertical deformation 	Average measured value	-	≤ 0.8 mm	≤ 1 mm	P1	P2	P2
	EN 14809 requirement	-	≤ 5 mm	≤ 5 mm	≤ 2 mm	≤ 3 mm	≤ 3 mm
TECHNICAL REQUIREMENTS							
Vertical ball behaviour 	Average measured value	-	Compliant	Compliant	Compliant	Compliant	Compliant
	EN 12235 requirement	-	≥ 90%	≥ 90%	≥ 90%	≥ 90%	≥ 90%
Reaction to fire	EN 13501-1	Bfl s1*	Cfl s1*	Cfl s1*	Cfl s1*/**	Cfl s1*/**	Cfl s1*/**
Resistance to wear 	EN ISO 5470-1	-	≤ 1g	≤ 1g	≤ 1g	≤ 1g	≤ 1g
Resistance to indentation 	Average measured value	-	≤ 0.18 mm	≤ 0.11 mm	≤ 0.10 mm	≤ 0.30 mm	Compliant
	EN 1516 requirement	-	≤ 0.50 mm	≤ 0.50 mm	≤ 0.50 mm	≤ 0.50 mm	≤ 0.50 mm
Resistance to a rolling load 	Average measured value***	-	-	Compliant	Compliant	Compliant	Compliant
	EN 1569 requirement	-	-	≤ 0.5 mm	≤ 0.5 mm	≤ 0.5 mm	≤ 0.5 mm
Transmitted impact noise	ISO 10140-3	-	20dB	20dB	21dB	21dB	21dB
Thermal resistance	EN ISO 10456	Approx. 0.02 m² K/W	Approx. 0.05 m² K/W	Approx. 0.07 m² K/W	Approx. 0.09 m² K/W	Approx. 0.12 m² K/W	Approx. 0.14 m² K/W
ENVIRONMENTAL PERFORMANCES							
Total VOC emissions	ISO 16000-9	≤ 10 µg/m³ (after 28 days)	≤ 10 µg/m³ (after 28 days)	≤ 10 µg/m³ (after 28 days)	≤ 10 µg/m³ (after 28 days)	≤ 10 µg/m³ (after 28 days)	≤ 10 µg/m³ (after 28 days)
Recycled content		32%	27%	21%	14%	16%	5%
COLOURS							
		Solid: 16 / Wood: 8	Solid: 16 / Wood: 8	Solid: 16 / Wood: 8	Solid: 16 / Wood: 8	Solid: 16 / Wood: 8	Solid: 3 / Wood: 3

The above information is subject to modification for the benefit of further improvement. (03/24). *Glued installation **GreenLay installation ***Measured on glued or with GreenLay™
Tarkett Sports' instructions regarding installation, cleaning and maintenance should be observed. Please contact Tarkett at the address shown for these instructions.



■ **WESTERN EUROPE:** Austria: Tarkett Holding GmbH - Tel. +43 1 716 440 • Belgium: Tarkett Sports - Tel. +32 52 26 24 29 • Denmark: Tarkett A/S - Tel. +45 43 90 60 11 • Finland: Tarkett Oy - Tel. +358 9 4257 9000 • France: Tarkett Sports - Tel. +33 1 41 20 41 34
 ■ Germany: Tarkett Holding GmbH - Tel. +49 621 68172 300 • Greece: Tarkett Monoprosopi Ltd. - Tel. +30 210 6745 340 • Italy: Tarkett S.p.A. - Tel. +39 0744 7551 • Luxembourg: Tarkett Sports - Tel. +352 949211 8230 • Netherlands: Tarkett Sports - Tel. +31 416 585 491
 ■ Norway: Tarkett AS - Tel. +47 32 20 92 00 • Portugal: Tarkett SA - Tel. +351 21 427 64 20 • Spain: Fieldturf Poligras Tel. +34 630 93 67 71 • Sweden: Tarkett Sverige AB - Tel. +46 771 25 19 00 • Switzerland: Tarkett Holding GmbH - Tel. +41 43 233 79 24
 ■ Turkey: Tarkett Turkey - Tel. +90 212 213 65 80 • United Kingdom: Tarkett Ltd. - Tel. +44 (0) 1622 954 040 ■ **EASTERN EUROPE:** Baltic Countries: Estonia: Tel. +372 55 51 5880 • Latvia: Tel. +371 26 112014 • Lithuania: Tel. +370 37 262220 • Czech Republic: Tarkett s.r.o. s.l.o.k.a
 • Hungary: Tarkett Polska Sp. z o.o. magyarországi fióktelepe - Tel. +36 1 437 8150 • Kazakhstan: Tarkett Kazakhstan - Tel. +7 7172 79 00 99 • Poland: Tarkett Polska Sp. z o.o. - Tel. +48 22 16 09 231 • Russian Federation: ZAO Tarkett RUS - Tel. +7 495 775 3737
 • Slovakia: Tarkett Polska Sp. z o.o. organizačná zložka - Tel. +421 2 48291 317 • **South East Europe:** Tarkett SEE - Tel. +381 21 7557 649 (44) 569 12 21 • Ukraine: Tarkett UA - Tel. +38 (0) 44 35 45 621 ■ **ASIA AND OCEANIA:** Australia: Tarkett Australia Pty Ltd. - Tel. +61 2 88 53 12 00
 • China: Tarkett Floor Covering (Shanghai) Co. Ltd. - Tel. +86 (21) 60 95 68 38 ext 841 • North East Asia: Tarkett Hong Kong Limited - Tel. +852 2511 8716 • India: Tarkett Flooring India Pvt. Ltd. - Bangalore - Tel. +91 80 4130 3793 • New Delhi - Tel. +91 11 4352 4073
 • Mumbai - Tel. +91 22 2648 8750 • **South East Asia:** Tarkett Flooring Singapore Pte. Ltd. - Tel. +65 6346 1585 ■ **AFRICA:** Tarkett International: Tel. +33 1 41 20 41 01 ■ **MIDDLE EAST:** Tarkett Middle East: Tel. +961 1 51 3363/4 • Israel: Tarkett International: +33 1 41 20 41 01
 ■ **NORTH AMERICA:** USA: Tarkett Inc. - Tel. +1 713 869 5811 • Johnsonite - Tel. +1 440 543 8916 • Canada: Tarkett Inc. - Tel. +1 450 293 173 ■ **LATIN AMERICA:** Brazil: Tarkett Brasil: Tel. +55 12 3954 7108 • Argentina - Chile - Uruguay: Tarkett Mercosur
 • Tel. +54 11 47 08 07 72 / +54 9 11 44 46 88 82 • Bolivia - Colombia - Ecuador - Panama - Paraguay - Peru - Trinidad and Tobago - Venezuela: Tarkett Latam - Tel. +55 11 9 8410 9310 / +55 11 95494 0069 • Mexico / Central America: Tarkett Mexico - Tel. +55 11 98410 9310



eu.tarkettsportsindoor.com

TarkettSPORTS
INDOOR